


SP-6 WM PRO

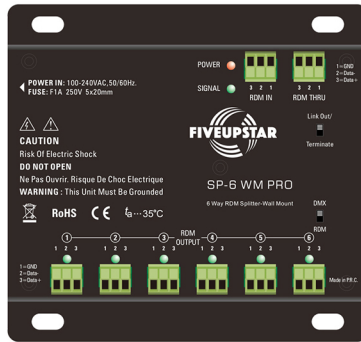

■ FEATURES

- RDM splitter with one input and six outputs
- Absolutely electric isolation between input and output
- Supporting RDM & USITT DMX-512(1990) protocol control
- Every RDM output features an independent driver to boost the RDM signal
- Sheet metal housing with black powder paint
- RDM/DMX switch and Linkout/Terminate switch on the panel for easy operation

■ SPECIFICATIONS

POWER INPUT	100-240VAC, 50/60Hz
FUSE	F1A, 250V, 5x20mm
OUTPUT	3-pin terminal connector (6pcs)
DATA IN & THRU	3-pin terminal connector
HOUSING	Sheet metal with powder painting
IP RATING	IP 20
CONTROL	RDM & DMX-512 protocol compatible
LISTING	RoHS, CE certified
OPERATING TEMPERATURE	-10 degC to +50degC
STORAGE TEMPERATURE	-20degC to +70degC
DIMENSIONS	134(L)x125(W)x40(H)mm
WEIGHT	570g