




明烽灯光
MINGFENG DENGGUANG



以质取市 以价服人 以量赢利

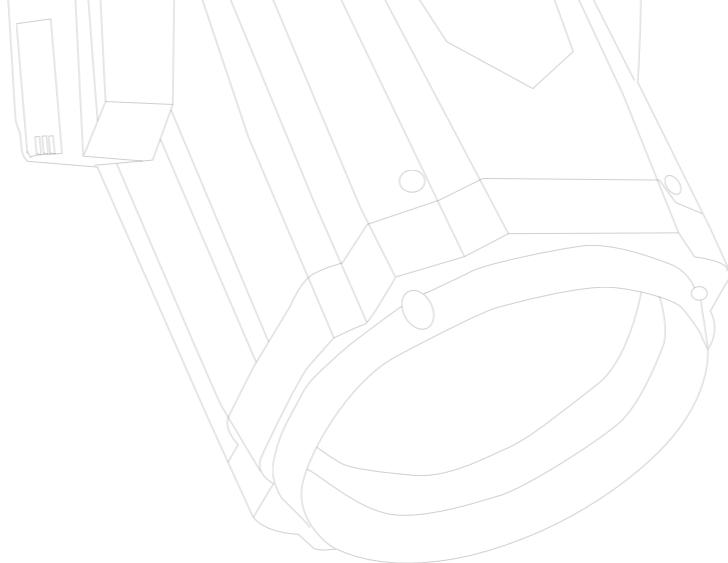

广州明烽灯光设备有限公司
Guangzhou Mingfeng Lighting Equipment Co., Ltd.

座机: 020-29806864

Q Q : 445968265

网址: www.mflighting.com.cn

www.sflight.cn

地址: 广州市白云区太和镇龙归北太路22号G栋



广州明烽灯光设备有限公司
Guangzhou Mingfeng Lighting Equipment Co., Ltd.

公司简介

本公司是一家集研发，生产，销售为一体的现代化舞台灯光企业，公司以创新的理念、优良的品质、专业
的态度，完善的检测系统，一流的服务理念，服务于国内外舞台，公司坐落在美丽的白云区龙归地铁站附
近，距离白云国际机场不到十分钟的路程，环境优美，交通便利。

本公司已导入现代化的管理模式和管理方法，并与多家国内外知名品牌进行OEM合作，展开技术合作，
使公司在产品质量方面得质的飞跃，今天的MF凭借先进的技术、卓越的品质、稳定的性能，以其高性价比的
产品、规范的市场操作、良好的售后服务、诚信为宗旨，从而得到国内外各大经销商与用户及同行的一致认
同，MF产品广泛应用到国内外各个领域，获得各界人士的一致好评。

公司的主要产品有电脑摇头灯（光束灯、LED图案灯，LED帕灯，成像灯、频闪灯、会议三基色，影视灯
具，娱乐效果灯，户外防水系列，）等一系列产品。经过多年的发展，企业规模不断扩大，管理也逐步完善，完全
按照ISO9000质量管理体系进行规模操作！‘以质取市，以价服人，以量赢利’是公司的经营之道，开发新的产
品，完善企业管理，掌握市场动态，提高服务质量及满足客户的需求是企业的经营目标！



COMPANY PROFILE

The company is a modern stage lighting company which integrates R&D, production and sales. The company is located at home and abroad with its innovative concept, excellent quality, professional attitude, perfect inspection system and first-class service concept. In the beautiful Baiyun District near Longgui Metro Station, less than ten minutes away from Baiyun International Airport, beautiful environment and convenient transportation.

The company has introduced modern management methods and management methods, and cooperated with a number of well-known domestic and foreign brands to carry out OEM cooperation, and started technical cooperation to make the company a qualitative leap in product quality. Today's MF is based on advanced technology and excellent quality, stable performance, with its cost-effective products, standardized market operations, good after-sales service, integrity for the purpose, which has been the major dealers and users at home and abroad and peer consensus, MF products are widely used in domestic and foreign The field has won praise from people from all walks of life.

The company's main products are moving head lights (beam lights, LED pattern lights, LED par lights, imaging lights, strobe lights, meeting three colors, film and television lighting, entertainment lights, outdoor waterproof series,) and a series of products. After years of development, the scale of the company has been continuously expanded and management has been gradually improved, and the scale operation has been completely carried out in accordance with ISO9000 quality management system! Taking quality and market, convincing people with the price, and profiting with quantity are the company's management methods. Developing new products, perfecting enterprise management, grasping market dynamics, improving service quality and satisfying customers' demands are the company's business objectives!

目录 COTENTS

光束摇头灯系列 Moving Head Beam Light Series	01-06
图案灯系列 Pattern Lightsseries	07-09
LED摇头灯系列 LED Moving Head Light Series	10-11
LED帕灯系列 LED Par Light Series	12-17
COB系列 COB Series	18
影视灯系列 TV Light Series	19-22
户外灯系列 Outdoor Lights Series	23-26
追光灯系列 Follow Light Series	27
效果灯系列 Effect Light Series	28-33
激光灯系列 Laser Light Series	34
控台系列 Console Series	35-36

MF-440S1

明烽440三合一（全能王1）
440W Moving Head Beam
Spot Wash Light



技术参数

电压：100~240V, 50/60Hz;
光源：欧司朗SIRIUS HRI 440W (可选YODN 20R)
平均寿命：2000H
总功率：650W
色温：8500K
显示：2.8寸宽屏液晶触摸屏，中英文显示界面，可倒转180°显示。
通道模式：20/24CH;
颜色盘：15+白色 (CTO,CMY可选择)
固定图案：16个图案 +白色。
旋转图案：9个图案 +白色，可变；
玻璃图案尺寸直径：14.9mm, 图像直径：10mm; 可定制客户LOGO,随意更换。
棱镜：8棱镜+16棱镜，(16+24棱镜可随意组合)
效果轮：固定与旋转棱镜可叠加，每个棱镜可混合使用。
调焦：线性电动调焦，光柱可大可小，线性放大，光学角：2.5~39°；旋转图案是4.5至40度，固定图案是3~30度。
雾化：进口耐高温雾化片，0%~100%雾化，雾化柔光染色效果，染色角度0~50度，可做定点追光面光使用。
调光：0%~100%机械调光平滑无闪，频闪0.5~14次/秒可调，支持机械频闪和可调速频闪效果，支持频闪宏功能。
旋转角度：X轴540度、Y轴270度可自动校正定位。水平垂直快锁便于产品运输及维护。
其它功能：可以远程DMX控制灯泡开关功能，控台点泡，灭泡，同时可在显示板设置通电亮泡功能，显示屏可显示灯具、灯泡使用时间，风机自动调速功能。
灯具外观：耐高温塑料+模压合金材料（采用高强度PA66原料具有耐高温，阻燃，抗老化耐磨，轻便防摔等特性）使用温度：-45°C至70°C，灯泡含过热保护。
Anti-radiation coating optical glass lens group, the lens inside the 6-layer full-film better translucent, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and rich.
IP rate: IP20
Product: 540x450x650 mm;
Package: 930x520x910 mm;
N.W: 20KG;
G.W: 25KG (CARTON)
净重: 20KG;
毛重: 25KG (纸箱)
毛重: 92KG (带有2合1的航空箱) ;

MF-380S1/MF-440S2

明烽380/440三合一（全能王2）
380W Moving Head Beam
Spot Wash Light



技术参数

电压: AC100~240V 50/60Hz
灯泡: OSRAM 371(欧司朗定制泡) 可选欧司朗440W 20R
平均寿命: 2000H
功率消耗: 600W
色温: 7800K
显示: 2.8寸宽屏液晶触摸屏，中英文显示界面，可倒转180°显示。
调焦: 线性电动调焦，光柱可大可小。
雾化: 进口耐高温雾化片，0%~100%雾化，雾化柔光染色效果，染色角度0~60度，可做定点追光面光使用，光束角度: 3°~20°，图案角度最大60°。
调光: 0%~100%机械调光平滑无闪，频闪0.5~14次/秒可调，支持机械频闪和可调速频闪效果，支持频闪宏功能。
控制通道: 20/24 DMX通道可切换
水平: 540° ; 8/16Bit;
垂直: 270° ; 8/16Bit;
540° 水平旋转角度及270° 垂直旋转角度，16 Bit高精度水平与垂直旋转，扫描位置记忆功能，自动纠错复位功能。
颜色: 一个固定颜色盘带11个颜色+白光，可半色效果，线性色彩转换及双向变速旋转彩虹效果
图案: 1个旋转图案盘带7个图案+白光，可变速抖动及双向流动效果
1个固定图案盘带14个图案+白色，可变速抖动及双向流动效果
1个动态图案盘带3个固定图案及1个动态图案，可变速抖动及双向流动效果。
玻璃图案尺寸直径: 15.9mm, 图像直径: 12mm; 可定制客户LOGO,随意更换。
棱镜: 8棱镜+16棱镜，(16+24棱镜可随意组合)
效果轮: 固定与旋转棱镜可叠加，每个棱镜可混合使用。
其它功能: 可以远程DMX控制灯泡开关功能，控台点泡，灭泡，同时可在显示板设置通电亮泡功能，显示屏可显示灯具、灯泡使用时间，风机自动调速功能。
灯具外观: 耐高温塑料+模压合金材料 (阻燃)
反辐射镀膜光学玻璃透镜组，透镜里外镀6层全膜透光性更好，明烽特制的光学系统令光束感更强，光束更实，无虚边，光束干净饱满。
防护等级: IP20的防护等级，可选防雨罩防护等级将达到IP44
产品尺寸: 42x32x67CM
净重: 22kg
Body size: 42x32x67CM
N.W: 22kg

SPECIFICATIONS

Voltage : 100~240V , 50 / 60Hz;
Lamp : OSRAM SIRIUS HRI 440W WD41MM; YODN 20R
Life : 2000H
Power : 650W
Color Temperature : 8500K
Display : 2.8inch LCD display, Chinese and English display interface, can be reversed 180° display.
DMX channels : 20/24CH;
Color Wheel : 15+open (CTO,CMY can choice C+5,M+5,Y+5) .
Fixed gobo wheel: 16gobos +open
Rotation gobo wheel: 9 +white
Glass Gobo size Diameter : 14.9mm, Image diameter : 10mm; can do customer's logo
Prism : 8prism+16prism, (16+24prism)
Effect wheel : fixed and rotating prism can be superimposed, each prism can be mixed use
Focus: linear electric focus, light column can be zoom, linear amplification, Optical angle: 2.5~39° ; Rotation gobo angle : 4.5~40 degree, fixed gobo angle : 3~30 degree
Frost: imported high temperature frost film, 0%~100% frost, atomizing soft wash effect, wash angle 0~50 degrees, can do point follow surface use.
Dimming: 0%~100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
Rotation angle : X 540 degree, Y 270degree
Other functions: remote DMX can control the lamp switch function, console point on / off the lamp, and can be set power on at the display board, the display can display lamp use time, fan can automatic adjust the speed
Lamps Appearance: high temperature plastic + molded alloy material (with high strength PA66 material avoid high temperature, flame retardant, anti-aging wear, light drop and other characteristics) Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
灯具外观: 耐高温塑料+模压合金材料 (采用高强度PA66原料具有耐高温, 阻燃, 抗老化耐磨, 轻便防摔等特性) 使用温度: -45°C至70°C, 灯泡含过热保护。
Anti-radiation coating optical glass lens group, the lens inside the 6-layer full-film better translucent, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and rich.
IP rate: IP20
Product: 540x450x650 mm;
Package: 930x520x910 mm;
N.W: 20KG;
G.W: 25KG (CARTON)
净重: 20KG;
毛重: 25KG (纸箱)
毛重: 92KG (带有2合1的航空箱) ;

OSRAM 371 (OSRAM custom bubble) Optional OSRAM 440W 20R

MF-350S1/MF-380S2

明烽350/371三合一（全能王3）
350w Moving Head Beam
Wash Spot Light

**MF-381BM**

明烽381超级光束（旗舰版）
380W Moving Head Beam
Wash Spot Light



技术参数

电压: AC100V~240V, 50/60Hz
光源: 优灯17R (可选欧司朗18R 371铂金泡)
光源功率: 350W
总功率: 500W
色温: 7500K
平均寿命: 2000H
显示: 2.8寸宽屏液晶触摸屏，中英文显示界面，可倒转180°显示。
调焦: 线性电动调焦，光柱可大可小，线性放大，光学角: 2.5~39° 旋转图案是4.5至40度，固定图案是3~30度。
雾化: 进口耐高温雾化片，0%~100%雾化，雾化柔光染色效果，染色角度0~40度，可做定点追光面光使用，光束角度: 2.5°~39° 图案角度最大40°
调光: 0%~100%机械调光平滑无闪，频闪0.5~14次/秒可调，支持机械频闪和可调速频闪效果，支持频闪宏功能。
控制通道: 16/24 DMX通道可切换。
颜色盘: 14+白色
双图案盘: 固定图案盒一个 (14个图案 +白色) +旋转图案盒一个(9个玻璃图案+光圈)
玻璃图案尺寸直径: 15.9mm, 图像直径: 12mm; 可定制客户LOGO,随意更换。
棱镜: 8棱镜+16棱镜，(16+24棱镜可随意组合)
效果轮: 固定与旋转棱镜可叠加，每个棱镜可混合使用。
水平: 540° ; 8/16Bit;
垂直: 270° ; 8/16Bit;
540° 水平旋转角度及270° 垂直旋转角度，16 Bit高精度水平与垂直旋转，扫描位置记忆功能，自动纠错复位功能。
其它功能: 可以远程DMX控制灯泡开关功能，控台点泡，灭泡，同时可在显示板设置通电亮泡功能，显示屏可显示灯具、灯泡使用时间，风机自动调速功能。
灯具外观: 高温塑料+Molded alloy material (flame retardant)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Horizontal vertical fast lock for product transportation and maintenance.

SPECIFICATIONS

Voltage : AC100V~240V, 50/60Hz
Lamp : 17R (Optional Osram 18R 371 Platinum Bubble)
Lamp power : 350W
Power : 500W
Color Temperature : 7500K
Life : 2000H
2.8 inch LCD display, English and Chinese display, can be reversed 180degree display
Focus: linear electric focus, beam can be zoom, angel 2.5~39 degree, rotation gobo angel 4.5~40 degree
Frost: imported high temperature frost film, 0%~100% frost, atomizing soft wash effect, wash angle 0~40 degrees, can do point follow surface use, beam angle 2.5~39 degree, the biggest gobo angle 40 degree
Dimming: 0%~100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
Control channels: 16/24 DMX
Color wheel : 14+White
2 gobo wheel: fixed gobo wheel (14 +white) +rotation gobo wheel (9glass gobo wheel +white)
Glass Gobo size Diameter : 15.9mm, Image diameter : 12mm; can order customer's logo
Prism : 8 prism+ 16prism, (16+24prism)
Effect wheel : fixed prism and rotation prism can add , each prism can use mix Pan : 540° ; 8/ 16Bit;
Tilt : 270° ; 8/ 16Bit;
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board, the display can display lamps, display can show the use time of the fixture and the bulb, fun have auto adjust speed function.
Appearance: high temperature plastic+Molded alloy material (flame retardant)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Horizontal vertical fast lock for product transportation and maintenance.

SPECIFICATIONS

Voltage: AC100~240V 50~60Hz
Lamp: 17R 350W YODN MSD (Optional YODN18R 380W)
Ballast: YODN MSD 17R
Lamp power: 350W
Power: 600W
Color Temperature: 7800K
Life: 2000H
Channels: 16 / 24CH;
LCD display, English and Chinese display, can be reversed 180degree display
UBS: Support the address code without power , can update the software external interface.
Color : 14 +white
2 gobo wheel: fixed gobo (14 +white) +rotation gobo (9 glass+white)
Glass Gobo size Diameter : 14.9mm, Image diameter : 10mm; can order customer's logo
2 Prism wheels: 11kinds of prism effect
2 Prism wheel : 1: one 16prism , one 6prism , 1 focus 2: one 32prism , one 6prism , one double prism (8+16)
Lens diameter: 175mm (large diameter thick beam)
Focus : linear electric focus, beam can be zoom 0~100% frost, frost soft wash effect, wash angle 0~20 degrees, can do point follow surface use, beam angle 0~2.5 degree , Lens diameter: 175mm (large diameter thick beam)
Dimming: 0%~100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
Pan: 540° ; 8Bit / 16Bit;
Tilt: 270° ; 8Bit / 16Bit;
Appearance: high temperature plastic+Molded alloy material (flame retardant)
(use high strength PA66 material with high temperature, flame retardant, anti-aging wear, light drop and other characteristics)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board, the display can display lamps, display can show the use time of the fixture and the bulb, fun have auto adjust speed function.
Horizontal vertical fast lock for product transportation and maintenance.
Pan: 540° ; 8Bit / 16Bit;
Tilt: 270° ; 8Bit / 16Bit;
Appearance: high temperature plastic+Molded alloy material (flame retardant)
(use high strength PA66 material with high temperature, flame retardant, anti-aging wear, light drop and other characteristics)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board, the display can display lamps, display can show the use time of the fixture and the bulb, fun have auto adjust speed function.
Horizontal vertical fast lock for product transportation and maintenance.

MF-350BM/MF-330BM

明烽新款351超级光束(工程版)
MingFeng New 351 Super Beam
(Engineering Version)

**MF-280BM/MF-330BM3**

明烽新款281超级光束(终结版)
New 280W Moving Head Beam Light



技术参数

输入电压: AC100~240V 50/60Hz
光源: S17 350W YODN MSD定制泡 (可选欧司朗330)
镇流器: YODN MSD S17
光源功率: 350W
整机功率: 500W
色温: 7800K
平均寿命: 2000H
雾化: 进口耐高温雾化片, 0%~100%雾化, 雾化柔光染色效果, 染色角度5~15度, 可做定点追光面光使用, 光束角度: 0~2.5° 透镜直径: 155mm (大口径粗光束)
调光: 0%~100%机械调光平滑无闪, 频闪0.5~14次/秒可调, 支持机械频闪和可调速频闪效果, 支持频闪宏功能。
通道: 标准16CH/20CH
Display: LCD display, English and Chinese display, can be reversed 180degree display
UBS: 支持不通电的情况拨地址码, 可做软件升级外置接口。
水平: 540° ; 8 / 16Bit;
垂直: 270° ; 8 / 16Bit;
旋转角度: X轴540度, Y轴270度可自动校正定位, 扫描位置记忆功能, 自动纠错复位功能。
颜色: 内置1个固定颜色盘带13个颜色+白光, 可半色效果, 线性色彩转换及双向变速旋转彩虹效果
固定图案: 内置1个固定图案盘带13个图案+白色, (可加4个固定玻璃图案) 可变速抖动及双向流动效果
棱镜: 两个独立的旋转棱镜, 双棱镜组合可生成40条锐利清晰的光束效果。(棱镜可随意组合8+16棱镜16+24/24+8) 可做七彩棱镜效果。
其它功能: 可以远程DMX控制灯泡开关功能, 控台点泡, 失泡, 同时可在显示屏设置通电亮泡功能, 显示屏可显示灯具、灯泡使用时间, 风机自动调速功能。
灯具外观: 耐高温塑料+模压合金材料 (采用高强度PA66原料具有耐高温, 阻燃, 抗老化耐磨, 轻便防摔等特性) 使用温度: -45° C至70° C, 灯泡含过热保护。
反辐射镀膜光学玻璃透镜组, 透镜里外镀6层全膜透光性更好, 明烽特制的光学系统令光束感更强, 光束更实, 无虚边, 光束干净饱满。
安全: 水平垂直快锁便于产品运输及维护。
防护等级: IP20的防护等级, 可选防雨罩防护等级将达到IP44
净重: 18kg
包装尺寸: 460X420X570mm

SPECIFICATIONS

Voltage: AC100~240V 50/60Hz
Lamp: S17 350W YODN MSD (or 330w)
Ballast: YODN MSD S17
Lamp power : 350W
Power: 500W
Color Temperature: 7800K
Life: 2000H
Focus: linear electric focus, beam can be zoom
Frost: imported high temperature frost film, 0% ~ 100% frost, atomizing soft wash effect, wash angle 5~15 degrees, can do point follow surface use,beam angle : 0~2.5 degree , Lens diameter: 175mm (large diameter thick beam)
Dimming: 0% ~ 100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
Channel: Standard 16CH/20CH
Display: LCD display, English and Chinese display, can be reversed 180degree display
UBS: Support dial the address code without power , can update the software external interface.
Pan: 540° ; 8 / 16Bit;
Tilt: 270° ; 8 / 16Bit;
Color: 1Fixed color wheel:13 +white, Can be half-color effect, Linear color conversion and Two-way variable speed rotation rainbow effect
Fixed gobo: 1 fixed gobo wheel; 13gobos +white, (can add 4 fixed glass gobo) Variable speed jitter and double water effect
Prism: two separate rotating prisms, two prisms combination can produces 40 pcs sharp and clear beam effects (8+16prism or 16+24/24+8) Can do colorful prism effect
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board , the display can display lamps, display can show the use time of the fixture and the bulb , fun have auto adjust speed function.
Appearance: high temperature plastic + molded alloy material(use high strength PA66 material with high temperature, flame retardant, anti-aging wear, light drop and other characteristics) Operating temperature: -45° C to 70° C, light drop with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better. Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Horizontal vertical fast lock for product transportation and maintenance.
IP:44
NW:18kg
Package size: 460X420X570mm

MF-271BM/MF-261(创业版)

明烽新款271超级光束(专业版)
New 260W Moving Head Beam Light



技术参数

输入电压: AC100~240V 50~60Hz
光源: SF 270定制高亮泡 (可选260)
光源功率: 270W
整机功率: 400W
色温: 7800K
平均寿命: 2000H
调焦: 线性电动调焦, 光柱可大可小。
雾化: 进口耐高温雾化片, 0%~100%雾化, 雾化柔光染色效果, 染色角度5~15度, 可做定点追光面光使用, 光束角度: 0~2.5° 透镜直径: 150mm (大口径粗光束)
调光: 0%~100%机械调光平滑无闪, 频闪0.5~14次/秒可调, 支持机械频闪和可调速频闪效果, 支持频闪宏功能。
通道: 标准16通道
显示: 2.8寸宽屏液晶触摸屏, 中英文显示界面, 可倒转180° 显示。
UBS: 支持不通电的情况拨地址码, 可做软件升级外置接口。
水平: 540° ; 8 / 16Bit;
垂直: 270° ; 8 / 16Bit;
旋转角度: X轴540度, Y轴270度可自动校正定位, 扫描位置记忆功能, 自动纠错复位功能。
颜色: 内置1个固定颜色盘带13个颜色+白光, 可半色效果, 线性色彩转换及双向变速旋转彩虹效果
固定图案: 内置1个固定图案盘带13个图案+白色, (可加4个固定玻璃图案) 可变速抖动及双向流动效果
棱镜: 两个独立的旋转棱镜, 双棱镜组合可生成40条锐利清晰的光束效果。(棱镜可随意组合8+16棱镜16+24/24+8) 可做七彩棱镜效果。
其它功能: 可以远程DMX控制灯泡开关功能, 控台点泡, 失泡, 同时可在显示屏设置通电亮泡功能, 显示屏可显示灯具、灯泡使用时间, 风机自动调速功能。
灯具外观: 耐高温塑料+模压合金材料 (采用高强度PA66原料具有耐高温, 阻燃, 抗老化耐磨, 轻便防摔等特性) 使用温度: -45° C至70° C, 灯泡含过热保护。
反辐射镀膜光学玻璃透镜组, 透镜里外镀6层全膜透光性更好, 明烽特制的光学系统令光束感更强, 光束更实, 无虚边, 光束干净饱满。
安全: 水平垂直快锁便于产品运输及维护。
防护等级: IP20的防护等级, 可选防雨罩防护等级将达到IP44
净重: 16.5kg
包装尺寸: 460X420X570mm

SPECIFICATIONS

Voltage : AC100~240V 50~60Hz
Lamp: SF 270 custom highlight bubble (optional 260)
Lamp power : 270W/330W
Power: 400W
Color Temperature: 7800K
Life: 2000H
Focus : linear electric focus, beam can be zoom
Frost: imported high temperature frost film, 0% ~ 100% frost, frost soft wash effect, wash angle 5~15 degrees, can do point follow surface use,beam angle .0~2.5 degree , Lens diameter: 155mm (large diameter thick beam)
Dimming: 0% ~ 100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
DMX channel: 16chs
2.8 inch LCD display, English and Chinese display, can be be reversed 180degree display
UBS: Support dial the address code without power , can update the software external interface.
Pan: 540° ; 8 / 16Bit;
Tilt: 270° ; 8 / 16Bit;
Color: 1Fixed color wheel:13 +white, Can be half-color effect, Linear color conversion and Two-way variable speed rotation rainbow effect
Fixed gobo: 1 fixed gobo wheel:13gobos +white, (can add 4 fixed glass gobo) Variable speed jitter and two-ways water effect
Prism: two separate rotating prisms, two prisms combination can produce 40 pcs sharps and clear beam effects (8+16prism or 16+24/24+8) Can do colorful prism effect
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board , the display can display lamps, display can show the use time of the fixture and the bulb , fun have auto adjust speed function.
Appearance: high temperature plastic+Molded alloy material (flame retardant)
(use high strength PA66 material with high temperature, flame retardant, anti-aging wear, light drop and other characteristics)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better. Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Horizontal vertical fast lock for product transportation and maintenance.
N.W.:16.5kg

MF-250BM

明烽250光束灯(升级版)
250w Moving Head Beam Light
(Double Prism Update Version)



技术参数

电压: AC100V~240V 50/60Hz
灯泡: YODN 8R 250W
灯泡功率: 250W
整机功率: 350W
镇流器: 电子镇流器
色温: 8500K
平均寿命: 2000H
显示: 采用宽屏LCD液晶中英文显示界面,旋钮可旋转180°
Color: 14+white, rainbow effect
Gobo: 1fixed gobo +1 white (can choice 6 glass gobo)
Prism: Double prism, can choice 8+16/16+24/prism, rotation 8/16prism, double rotation Soft effect: Adjustable light spot angle
棱镜: 双棱镜叠加, 可选8+16/16+24棱镜, 旋转8/16棱镜, 可以双向旋转
柔光效果: 可调节柔光的光斑角度
调焦: 线性调焦
调光: 0~100%线性调整
光束角度: 0~3.8°
频闪: 双片式频闪 (0.5~9次/秒)
马达数量: 共10个超静音马达
控制方式: DMX512 16/20CH
Pan: 540° ; 8Bit / 16Bit;
垂直: 270° ; 8Bit / 16Bit;
其它功能: 可以远程DMX控制灯泡开关功能, 控台点泡, 失泡, 同时可在显示屏设置通电亮泡功能, 显示屏可显示灯具、灯泡使用时间, 风机自动调速功能。
灯具外观: 耐高温塑料+模压合金材料 (阻燃) 使用温度: -45° C至70° C, light bulbs with overheating protection function
反辐射镀膜光学玻璃透镜组, 透镜里外镀6层全膜透光性更好, 明烽特制的光学系统令光束感更强, 光束更实, 无虚边, 光束干净饱满。
安全: 水平垂直快锁便于产品运输及维护。
IP20的防护等级, 可选防雨罩将防护等级达到IP44
包装尺寸: 440x410x540mm
航空箱尺寸: 830x480x720mm;
净重: 17.5KG;
毛重: 21.2KG (纸箱)
毛重: 70KG (航空箱2合1);

SPECIFICATIONS

Voltage : AC100V~240V 50/60Hz
Lamp: YODN 8R 250W
Lamp power: 250W
Power: 350W
Ballast: electric ballast
Color Temperature: 8500K
Life: 2000H
LCD display, English and Chinese display, can be reversed 180degree display
Color: 14+white, rainbow effect
Gobo: 1fixed gobo +1 white (can choice 6 glass gobo)
Prism: Double prism, can choice 8+16/16+24/prism, rotation 8/16prism, double rotation Soft effect: Adjustable light spot angle
Focus: liner focus
Beam angel: 0~3.8° ;
Strobe: two-piece strobe (0.5~9 times / sec)
Motor: 10pcs
Control mode: DMX512
Channels : 16/20CH
Pan: 540° ; 8Bit / 16Bit;
Tilt: 270° ; 8Bit / 16Bit;
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board , the display can display lamps, display can show the use time of the fixture and the bulb , fun have auto adjust speed function.
Appearance: high temperature plastic+Molded alloy material (flame retardant)
(use high strength PA66 material with high temperature, flame retardant, anti-aging wear, light drop and other characteristics)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better. Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Horizontal vertical fast lock for product transportation and maintenance.
N.W.:17.5kg
Package size: 440x410x540mm
Flycase size: 830x480x720mm;
N.W.: 21.2KG (Carton)
G.W.: 70KG (flycase 2in1);

MF-230BM/MF-200BM**明烽230光束灯**

200/230W Moving Head Beam Light

**MF-150BM****明烽150光束灯**

150W Moving Head Beam Light



技术参数

电压: AC100V~240V 50/60Hz
灯泡: PHILIPS 5R 189W OSRAM 7R 230W (可选7R YODN灯泡)
灯泡功率: 200W/230W
整机功率: 350W
镇流器: 电子镇流器
色温: 8500K
平均寿命: 2000H
显示: 采用宽屏LCD液晶中英文显示界面, 旋钮可旋转180°
颜色: 带有14种颜色+白光, 彩虹效果
图案: 带有17个固定图案+空白
棱镜: 旋转8/16棱镜, 可以双向旋转
柔光效果: 可调节柔光的光斑角度
调焦: 线性调焦
调光: 0~100%线性调整
光束角度: 0~2.3°
频闪: 双片式频闪 (0.5~9次/秒)
控制方式: DMX512 16/20CH
X轴水平: 540° ; 8Bit / 16Bit;
Y轴垂直: 270° ; 8Bit / 16Bit;
其它功能: 可以远程DMX控制灯泡开关功能, 控台点泡, 灭泡, 同时可在显示板设置通电亮泡功能, 显示屏可显示灯具、灯泡使用时间, 风机自动调速功能。
外观: 耐高温塑料+模压合金材料 (阻燃) 使用温度: -45° C至70° C, 灯泡含过热保护。
反辐射镀膜光学玻璃透镜组, 透镜里外镀6层全膜透光性更好, 明烽特制的光学系统令光束感更强, 光束更实, 无虚边, 光束干净饱满。
安全: 水平垂直快锁便于产品运输及维护。
IP20的防护等级, 可选防雨罩将防护等级达到IP44
包装尺寸: 440x410x540mm
航空箱尺寸: 830x480x720mm;
净重: 17.5KG;
毛重: 21.2KG (纸箱)
毛重: 70KG (航空箱2合1)

SPECIFICATIONS

Voltage : AC100V~240V 50/60Hz
Lamp : PHILIPS 5R 189W OSRAM 7R 230W (can do 7R YODN lamp)
Lamp power: 200W/230W
Power, 350W
Ballast, electric ballast
Color Temperature: 8500K
Life, 2000H
Display, LCD display, English and Chinese display, can be reversed 180degree display
Color : 14 + white, rainbow
Gobo: 17 fixed gobo+ white
Prism: Rotation 8/16prism, double rotation
Soft effect: Adjustable light spot angle
Focus: liner focus
Dimmer: 0~100% Liner dimmer
Beam angel : 0~2.3°
Strobe: two-piece strobe (0.5~9 times / sec)
Control mode, DMX512
Channels : 16/20CH
Pan: 540° ; 8Bit / 16Bit;
Tilt: 270° ; 8Bit / 16Bit;
Other functions: remote DMX can control the lamp switch function, console point control power on/off, and can be set at the same time can be set power on function at the display board, the display can display lamps, display can show the use time of the fixture and the bulb , fun have auto adjust speed function.
Appearance: high temperature plastic+Molded alloy material (flame retardant)
Operating temperature: -45° C to 70° C, light bulbs with overheating protection function
Anti-radiation coating optical, high-precision glass lens group, inside and outside 6-layer full film let the Translucent more better, Ming Feng special optical system to make a stronger sense of the beam, the beam is more real, no virtual side, the beam clean and full.
Horizontal vertical fast lock for product transportation and maintenance.
Ip20
Carton size: 440x410x540mm
Flycase size: 830x480x720mm;
NW : 17.5KG;
GW: 21.2KG (carton)
GW: 70KG(flycase 2in1)

MF-F350BM**明烽350防水光束灯**
350W Moving Head Waterproof Beam Light

技术参数

输入电压: AC100~240V 50/60Hz
光源: S17 350W YODN MSD高亮泡
镇流器: YODN MSD S17
光源功率: 350W
整机功率: 550W
通道DMX: 16CH
控制方式: DMX512, 声控, 自走, 主从机
光源: 理论寿命 1500小时以上
色温: 7800K
光束角度: 2°
调光: 调光平滑无闪
频闪: 独立频闪、0.5~20次/秒可调
颜色: 14 + 1, 彩虹效果
图案轮: 17静态图案 + 1白色
调光: 0%~100%线性调光
棱镜: 8棱镜, (或者16棱镜) 旋转和微距功能
水平/垂直: 540° 水平或270° 垂直扫描
IP防护等级: IP55
毛重: 57KG
尺寸: 57 * 47 * 95cm

SPECIFICATIONS

Input voltage: AC100~240V 50/60Hz
Light source: S17 350W YODN MSD highlight bubble
Ballast: YODN MSD S17
Light source power: 350W
Machine power: 550W
Channel DMX: 16CH
Control mode: DMX 512, voice activated, self-propelled, master slave
Light Source: Theoretical Life 1500 hours
Color temperature: 7800K
Beam angle: 2°
Dimming: Dimming smooth without flash
Strobe: Independent strobe, 0.5~20 times / second adjustable
Color: 14 + 1, Rainbow effect
Pattern wheel: 17 static patterns + 1 white
Dimming: 0%~100% linear dimming
Prism: 8 prism, (or 16 prism) rotation and macro function
Horizontal/Vertical: 540° Horizontal or 270° Vertical Scan
IP protection class: Ip55
Gross weight: 57KG
Size: 57 * 47 * 95cm

MF-F440BM**明烽440/350防水光束灯**
440W Moving Head Waterproof Beam Light

技术参数

电压: AC90~240V 50/60Hz
光源: 20R YODN 440W MSD(17R 350W)
Lamp power: 440W
Power : 650W
Life: 2000 hours
Color Temperature: 8500K
DMX channels: 16chs (CMY 20HS)
Focus : linear electric focus, beam can be zoom
Frost: imported high temperature frost film, 0% ~100% frost, atomizing soft wash effect, wash angle 5~15 degrees, can do point follow surface use, beam angle 0~2.5 degree, Lens diameter: 175mm (large diameter thick beam)
Dimming: 0% ~100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
Color wheel: 11 colors +white (can定制CMY)
Color Temperature::2500K、3200K can choice
Fixed gobo wheel: 12个图案+1白色+可双向抖动、动画、流水效果
棱镜: 8棱镜+16棱镜, (16+24棱镜可随意组合)
效果轮: 固定与旋转棱镜可叠加, 每个棱镜可混合使用。
水平: 540° ; 8 / 16Bit;
垂直: 270° ; 8 / 16Bit;
旋转角度: X轴540度、Y轴270度可自动校正定位。
散热系统:
反辐射镀膜光学玻璃透镜组, 透镜里外镀6层全膜透光性更好, 明烽特制的光学系统令光束感更强, 光束更实, 无虚边, 光束干净饱满。
灯具外观: 耐高温塑料+模压合金材料 (采用高强度PA66原料具有耐高温, 阻燃, 抗老化耐磨损, 轻便防摔等特性) 使用温度: -45° C至70° C, 灯泡含过热保护。
适用于各种全天候户外建筑工程, 露天舞台表演, 户外演出不在惧怕雨神的到来, 在空中任意摇摆。
防护等级: IP55
灯体尺寸: 418*378*620(mm) 25kg
纸箱尺寸: 440*420*810mm 27kg
航空箱: 500*435*825mm 44kg 1pcs
925*500*825mm 82kg 2pc

SPECIFICATIONS

Voltage: AC90~240V 50/60Hz
Lamp: 20R 440W YODN MSD(17R 350W)
Lamp power: 440W
Power : 650W
Life: 2000 hours
Color Temperature: 8500K
DMX channels: 16chs (CMY 20HS)
Focus : linear electric focus, beam can be zoom
Frost: imported high temperature frost film, 0% ~100% frost, atomizing soft wash effect, wash angle 5~15 degrees, can do point follow surface use, beam angle 0~2.5 degree, Lens diameter: 175mm (large diameter thick beam)
Dimming: 0% ~100% mechanical dimming, smooth no flash, strobe 0.5~14 times / sec can adjustable, support for mechanical strobe and adjustable speed strobe effect, support strobe macro function.
Color wheel: 11 colors +white (can定制CMY)
Color Temperature::2500K、3200K can choice
Fixed gobo wheel: 12个图案+1白色+可双向抖动、动画、流水效果
棱镜: 8棱镜+16棱镜, (16+24棱镜可随意组合)
效果轮: 固定与旋转棱镜可叠加, 每个棱镜可混合使用。
水平: 540° ; 8 / 16Bit;
垂直: 270° ; 8 / 16Bit;
旋转角度: X轴540度、Y轴270度可自动校正定位。
散热系统:
反辐射镀膜光学玻璃透镜组, 透镜里外镀6层全膜透光性更好, 明烽特制的光学系统令光束感更强, 光束更实, 无虚边, 光束干净饱满。
灯具外观: 耐高温塑料+模压合金材料 (采用高强度PA66原料具有耐高温, 阻燃, 抗老化耐磨损, 轻便防摔等特性) 使用温度: -45° C至70° C, 灯泡含过热保护。
适用于各种全天候户外建筑工程, 露天舞台表演, 户外演出不在惧怕雨神的到来, 在空中任意摇摆。
防护等级: IP55
灯体尺寸: 418*378*620(mm) 25kg
纸箱尺寸: 440*420*810mm 27kg
航空箱: 500*435*825mm 44kg 1pcs
925*500*825mm 82kg 2pc

MF-1500T

1500W图案灯

1500W Moving Head Spot Light



技术参数

电压：200V~240V AC, 50/60Hz
额定功率：1800W@220V
镇流器：电子镇流器功率因数≥0.95
灯泡规格：PHILIPS MSR Gold 1510 SA DE
色温5800K 灯座SFc10-4，双端
OSRAM HTI 1500W/D7/60.色温6000K 灯
座SFc10-4，双端 额定寿命750小时
颜色：CMY线性混色系统，具宏指令功能，1个
颜色盘：6个颜色+白光,半色效果，可变速双向
彩虹效果，步进线性颜色转换可选
色温校正：0~100%线性色温系统
雾化：柔光0~100%线性调节
调焦：DMX线性调焦
光束角度：线性变焦9°~37°，定焦扩展至40°，
44°可选（具有16Bit精度调节）
调光：0~100%线性调节
频闪：双片式频闪（0.3~12/秒）
光圈：5~100%线性调节，具宏指令
旋转角度：水平450度，垂直270度，具自动回
位纠正功能
控制方式：国际标准DMX512信号，3芯、5芯
DMX512接口，RDM控制协议
通道数量：3个DMX通道模式选择，精简模式24
通道，标准模式29通道、扩展模式32道，自检模式。
其它功能：水平、垂直速度可调；显示灯具、灯泡
使用时间LCD中英文双语菜单，亮度、对比度可调
，线性调节自动节能，传感器故障诊断系统，输入信号隔
离保护功能；便于维护的模块化结构；功能升级网卡接口。

SPECIFICATIONS

Voltage: 200V~240V AC, 50/60Hz
Rated power: 1800W @ 220V
Ballast: electronic ballast power factor ≥ 0.95
Lamp specifications: PHILIPS MSR Gold 1510 SA DE
color temperature 5800K lamp holder SFc10-4, double-
ended
OSRAM HTI 1500W / D7 / 60. Color temperature 6000K lamp
holder SFc10-4, double-ended rated life of 750 hours
Color CMY Linear Mixing System, with macro function, 1 color
disc, 6 colors + white, half color effect, variable speed
bidirectional
rainbow effect, stepper / linear color conversion optional
Color temperature correction: 0~100% linear drop color
temperature system
Atomization: Soft 0~100% linear adjustment
Focus DMX linear focus
Beam angle: linear zoom 9°~37°, fixed focus extended to 40°,
44° optional
(with 16Bit precision adjustment)
Dimming: 0~100% linear adjustment
Strobe: two-chip strobe (0.3~12 times / sec)
Aperture: 5~100% linear adjustment, with macro
Rotation angle: horizontal 450 degrees, vertical 270 degrees,
return position correction
Control mode: international standard DMX512 signal, 3 core, 5
DMX512 interface.
Number of channels: 3 DMX channel modes: Compact mode
24 channels, standard mode 29 channels, extended mode 32 channels,
Other functions: horizontal and vertical speed adjustable;
display lamps, lamp time, LCD Chinese and English bilingual menu, brightness, contrast
adjustable, ballast
automatic energy saving, sensor fault diagnosis system. Input
signal isolation protection; Structure: function upgrade NIC interface.

MF-A300W

LED300W摇头图案灯

LED300W Moving Head Pattern Light



技术参数

光源：300W LED白光模块
最大功率：350W
功率：宽电压输入切换
电源100V~240V 50/60Hz
色温：7500K
灯寿命：50000小时
光斑角度：10~60°
控制模式：21个通道，DMX512信号输入，自动
操作X/Y扫描，水平540°，垂直270°
颜色：7色片+白色，彩虹效果，可定位
图案：7个可插式图案片，图案旋转，图案水效果
固定模式：8个固定模式+白光，抖动，正面
负面水效果调光：0~100%线性调光
频闪：每秒0~25HZ/S，同步脉冲频闪，随机
频闪脉冲等
效果：3棱镜，正负旋转，光圈变焦
进出，添加效果固定的磁盘，可以加快运行速度
风扇：随灯珠的温度而变化
显示面板：液晶显示，英文和中文显示，可以倒置显示，
灯温度显示
包装尺寸：50 * 50 * 61CM
毛重：20KG

SPECIFICATIONS

Light source: 300W LED white light module
Maximum power: 350W
Power: wide voltage input switching
Power supply 100V~240V 50/60Hz
Color temperature: 7500K
Lamp life: 50000 hours
Spot angle: 10~60°
Control mode: 21 channels, DMX512 signal input, automatic
Operation X/Y scanning: horizontal 540° , vertical 270°
Color: 7 colors + white, rainbow effect, can be positioned
Pattern: 7 insertable pattern pieces, pattern rotation, pattern
water effect
Fixed mode: 8 fixed modes + white, dithered, positive
Negative water effect dimming: 0~100% linear dimming
Strobe: 0~25 ZH / S per second, sync pulse strobe, random
Strobe pulse
Effect: 3 prism, positive and negative rotation, aperture zoom
In and out, add a fixed disk, can speed up the speed
Fan: Changes with lamp temperature
Display panel: liquid crystal display, English and Chinese
display, can be inverted display.
Lamp temperature display
Packing size: 50 * 50 * 61CM
Gross weight: 20KG

MF-A200W

200W LED摇头图案灯

200W LED Moving Head Spot Light



技术参数

电压：AC100V~240V 50/60Hz
光源：200W白光LED白光模组
功率：300W
色温：6500K
灯珠寿命：50000 hours
光斑角度：16°
控制方式：17通道
DMX512信号输入、声控、自动运行
X/Y扫描：水平540°，垂直：270° +精确扫描
颜色盘：基础7片+白光，可调速度彩虹效果。
固定图案：8个图案+白光，图案往返流水由慢到快。
旋转图案：6个图案+白光，可双向变速旋转，及旋转角度
定位，可用于定制LOGO投射。
调光：0~100%线性调光。
频闪：1~20次/秒，同步脉冲频闪，随机脉冲频闪。
雾化：雾化镜用于染色投光。
效果盘：3棱镜，梯形棱镜，5棱镜，带旋转流水效果。
显示：彩色液晶显示，中英文显示，可倒转显示。
高效热导管散热系统，无灯珠损坏风险。
双快速锁吊挂安装。
外观：耐高温塑料+模压合金材料（阻燃）
防护等级：IP20
毛重：9.7KG
尺寸：258 * 180* 400mm

SPECIFICATIONS

Voltage : AC100V~240V 50/60Hz
Lamp : 200WwhiteLED
Power: 300W
Color Temperature: 6500K
Life : 50000 hours
Beam angle: 16°
DMX channels: 17chs
DMX512, sound, Auto
Pan:540° , Tilt: 270°
Color Wheel: 7 +white, adjust the speed ,rainbow effect
Fix gobo: 8 gobo+white
Rotation gobo: 6 gobo +white, Can be two-way variable
speed rotation, and rotation angle positioning, can be used for
custom LOGO projection
Dimmer: 0~100% liner dimmer
Strobe: 1~20/s, Sync pulse strobe, random pulse strobe
Frost: frost mirror used for wash
Effect wheel: 3prism, 6prism , 5prism, With rotating water
effect
Display: Colorful LCD display, in English Chinese display,
can be reversed display
Efficient heat pipe cooling system,
Double fast lock hanging installation,
Appearance: high temperature plastic+Molded alloy material
(flame retardant)
IP rate : Ip20
G.W: 9.7KG
Size: 258 * 180* 400mm

MF-A150W

明烽150W LED摇头图案灯

150W LED Moving Head Spot Light



技术参数

电压：AC100V~240V 50/60Hz
光源：150W白光LED白光模组
功率：250W
色温：6500K
灯珠寿命：50000 hours
光斑角度：16°
控制方式：17通道
DMX512信号输入、声控、自动运行
X/Y扫描：水平540°，垂直：270° +精确扫描
颜色盘：基础7片+白光，可调速度彩虹效果。
固定图案：8个图案+白光，图案往返流水由慢到快。
旋转图案：6个图案+白光，可双向变速旋转，及旋转角度
定位，可用于定制LOGO投射。
调光：0~100%线性调光。
频闪：1~20次/秒，同步脉冲频闪，随机脉冲频闪。
雾化：雾化镜用于染色投光。
效果盘：3棱镜，梯形棱镜，5棱镜，带旋转流水效果。
显示：彩色液晶显示，中英文显示，可倒转显示。
高效热导管散热系统，无灯珠损坏风险。
双快速锁吊挂安装。
外观：耐高温塑料+模压合金材料（阻燃）
防护等级：IP20
毛重：9.7KG
尺寸：258 * 180* 400mm

SPECIFICATIONS

Voltage : AC100V~240V 50/60Hz
Lamp : 150WwhiteLED
Power: 250W
Color Temperature: 6500K
Life : 50000 hours
Beam angle: 16°
DMX channels: 17chs
DMX512, sound, Auto
Pan:540° , Tilt: 270°
Color Wheel: 7 +white, adjust the speed ,rainbow effect
Fix gobo: 8 gobo+white
Rotation gobo: 6 gobo +white, Can be two-way variable
speed rotation, and rotation angle positioning, can be used for
custom LOGO projection
Dimmer: 0~100% liner dimmer
Strobe: 1~20/s, Sync pulse strobe, random pulse strobe
Frost: frost mirror used for wash
Effect wheel: 3prism, 6prism , 5prism, With rotating water
effect
Display: Colorful LCD display, in English Chinese display,
can be reversed display
Efficient heat pipe cooling system,
Double fast lock hanging installation,
Appearance: high temperature plastic+Molded alloy material
(flame retardant)
IP rate : Ip20
G.W: 9.7KG
Size: 258 * 180* 400mm

MF-A200S1

200W LED三合一摇头灯

200W LED 3 in 1 Maing Head Light



技术参数

电压：AC100V~240V 50/60Hz
光源：200W白光LED白光模组
功率：200W
色温：6800K
灯珠寿命：50000 hours
光斑角度：16°
控制方式：14通道和16通道2种通道模式，
DMX512信号输入、声控、自动运行
X/Y扫描：水平540°，垂直：270° +精确扫描
颜色：8个色片+纯白光，彩虹效果，可任意定位
图案：8个可插拔式图案片，图案旋转，
图案流水效果
调光：0~100%线性调光
频闪：同步脉冲频闪，随机脉冲频闪
效果盘：3棱镜，梯形棱镜，5棱镜，带旋转流水效果
显示：彩色液晶显示，中英文显示，可倒转显示。
高效热导管散热系统，无灯珠损坏风险。
外观：耐高温塑料+模压合金材料（阻燃）
防护等级：IP20
产品尺寸：300 * 200 * 490mm
包装尺寸：400 * 360 * 510mm
净重：13.6KG
毛重：14KG

SPECIFICATIONS

Voltage: AC100V~240V 50/60Hz
Lamp : 200W white LED
Power: 200W
Color Temperature: 6800K
Life: 50000 hours
Beam angle: 16°
DMX 512 Channels : 14chs/16chs
DMX512, Sound, Auto
Pan:540° , Tilt: 270°
Color: 8 +1 white, rainbow effect
Gobo: 8 gobo, rotation,Gobo have water effect
Dimmer: 0~100% liner dimmer
Strobe: Sync pulse strobe, random pulse strobe
Effect wheel: 3prism, 6prism , 5prism, With rotating water
effect
Display: Colorful LCD display, English and Chinese display,
can be reversed display
High Efficient heat pipe cooling system,
Appearance: high temperature plastic+Molded alloy material
(flame retardant)
Ip rate: IP20
Body Size: 300 * 200 * 490mm
Package size: 400 * 360 * 510mm
N.W: 13.6KG
G.W: 14KG

MF-A90W

90W LED摇头图案灯

90W LED Moving Head Spot Light



技术参数

电压：AC100V~240V 50/60Hz
功率：90W
光源：1颗90W LED白光模组
通道：11或14通道
信号：LED光源 信号: DMX512
图案盘1:9图案+空位,图案抖动+旋转
图案盘2:7个旋转图案+白光+彩虹效果
图案旋转:转速度及正反可调
频闪：0~10次/秒
可调棱镜：3棱镜
棱镜旋转：旋转速度及正反可调
调焦：电动调焦
角度：13°
水平：540度
垂直：270度
重量：13.6kg
尺寸：290x295x485 mm

SPECIFICATIONS

Voltage: AC100V~240V/50/60Hz
Power: 90W
Lamp: 90W
Dmx Channels : 11/14chs
DMX512
Gobo wheel 1:9 + white ,gobo jitter+rotation
Gobo wheel 2:7 rotation gobo +white+rainbow effect
Gobo rotation:Rotation speed , positive and negative
adjustable
Strobe: 0~10/s
Prism: 3prism
Prism Rotation: Rotation speed , positive and negative
adjustable
Focus: Electric focus
Angle: 13°
Pan: 540 degree
Tilt: 270degree
Weight: 13.6kg
Size: 290x295x485 mm

图案灯系列 Pattern Light Series

MF-A60W

60W LED摇头图案灯
60W LED Moving Head Spot Light



技术参数

电压: AC100V~240V/50/60Hz
功率: 60W
光源: 1颗60W LED白光模组
通道: 11或14通道
信号: LED光源 信号: DMX512
图案盘 1:9图案+空位,图案抖动+旋转
图案盘 2:7个旋转图案+白光+彩虹效果
图案旋转:转速度及正反可调
频闪: 0~10次/秒
可调棱镜: 3棱镜
棱镜旋转: 旋转速度及正反可调
调焦: 电动调焦
角度: 13°
水平: 540度
垂直: 270度
重量: 13.6kg
尺寸: 290x295x485 mm

技术参数

电压: AC100V~240V/50/60Hz
功率: 60W
光源: 美国Luminus 30W大功率灯珠
控制: 显示板操作 自走/主从/声控
通道: 14chs/11chs
光学系统: 电子调焦
调光: 0~100% 电子变焦
频闪: 0~20Hz
光束角度: 15°
棱镜: 可旋转三棱镜
扫描角度: 水平540° 垂直270°
图案&色彩: 旋转图案 7+1个金属图案(可互换)
图案效果: 流水效果、图案抖动, 正反方向旋转
静态图案: 9个金属图案 色彩7个色片 + 白光
净重: 3KG
毛重: 4.5KG
包装尺寸: 495 (L) * 325 (W) * 270 (H) mm (2in1)

技术参数

电压: AC100V~240V/50/60Hz
功率: 30W
光源: 美国Luminus 10W大功率灯珠
控制: 显示板操作 自走/主从/声控
通道: 14chs/11chs
光学系统: 电子调焦
调光: 0~100% 电子变焦; 频闪 0~20Hz; 光束角度 15°
棱镜: 可旋转三棱镜
扫描角度: 水平540° 垂直270°
图案&色彩: 旋转图案 7+1个金属图案(可互换)
图案效果: 流水效果、图案抖动, 正反方向旋转
静态图案: 9个金属图案 色彩7个色片 + 白光
净重: 3KG
毛重: 4.5KG
包装尺寸: 495 (L) * 325 (W) * 270 (H) mm (2in1)

技术参数

电压: AC90~240V 50/60Hz
灯珠数量: 4X25W大功率白光灯珠
控制模式: DMX 512, 主从机,
声控及自走模式
控制通道: 11/16 DMX通道
功率消耗: 120W
产品尺寸: 205X275X320mm
包装尺寸: 360x280x440mm
净重: 7.5kg
毛重: 9.0kg

SPECIFICATIONS

Voltage: AC100V~240V/50/60Hz
Power: 60W
Light source: 1 60W LED white light module
Channel: 11 or 14 channels
Signal: LED light source Signal: DMX512
Pattern plate 1:9 pattern + space, pattern jitter + rotation
Pattern plate 2: 7 rotation patterns + white light + rainbow effect
Pattern rotation: speed and positive and negative adjustment
Strobe: 0~10 times/second
Adjustable prism: 3 prisms
Prism rotation: rotation speed and forward and reverse adjustment
Focusing: Electric Focusing
Angle: 13°
Level: 540 degrees
Vertical: 270 degrees
Weight: 13.6kg
Size: 290x295x485 mm

SPECIFICATIONS

Voltage: AC100V~240V/50/60Hz
Power: 60W
Light Source: American Luminus 30W High Power Lamp Beads
Control: Display Panel Operation Self-propelled/master/slave/voice control
Channel: 14chs/11chs
Optical System: Electronic Focusing
Dimming: 0~100% Electronic zoom
Strobe: 0~20Hz
Beam angle: 15°
Prism: rotatable prism
Scanning Angle: Horizontal 540° Vertical 270°
Patterns & Colors: Rotating Patterns 7+1 Metal Patterns (Interchangeable)
Pattern effect: water effect, pattern jitter, forward and reverse rotation
Static pattern: 9 metal patterns Color 7 colors + white light
Net weight: 3KG
Gross weight: 4.5KG
Packing size: 495(L)*325(W)*270(H)mm(2in1)

SPECIFICATIONS

Voltage : AC100V~240V/50/60Hz
Power : 30W
Lamp: Luminus 10W high power led
Control: display
Auto/master-slave /sound
DMX Channels: 14chs/11chs
Optical system: electronic focus
Focus : 0~100% Electric focus
Strobe: 0~20Hz
Beam angel: 15°
Prism: Rotation 3 prisms
Scan angel: Pan:540° Tilt: 270°
Gobo&Color: 7 Rotation gobo +1 metel gobo
Gobo effect: Water effect, Gobo jitter, positive and negative direction rotation
Fixed gobo: 9
Color: 7 + white
NW: 3KG
GW: 4.5KG
Package size: 495 (L) * 325 (W) * 270 (H) mm (2in1)

SPECIFICATIONS

Voltage: AC90~240V 50/60Hz
LED Quantities: 4X25W White LED
Control Mode: DMX 512, Master/Slave,
Sound Activated and Work Auto
Control Channel: 11/16 DMX Channels
Power consumption: 120W
Dimension: 205X275X320mm
Packing Size: 360x280x440mm
N.W: 7.5kg
G.W: 9.0kg

LED摇头灯系列 LED Moving Head Light Series

MF-0140W

明峰LED迷你小摇头 (单面光束)
LED Mini Moving Head Light (single beam)



技术参数

输入功率: AC100~240V 50/60 Hz
功率: 55 W
LED光源: 1 PCS 40W大功率RGBW LED
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
调光: 0~100%线性调光, 平滑无闪烁.
DMX通道: 7 / 16CH
水平/垂直: X轴540° 或
无限旋转, Y轴180°
8个内部程序, 声音模式可以通过DMX 512进行控制
光束角度: 3°
防护等级: IP20
净重: 2.5KG
毛重: 3.5KG
尺寸: 32.5X25X27Cm cm
包装尺寸: 54X34X29Cm (2个)

MF-0410SM

明峰LED迷你混合小摇头
LED Mini Mix Moving Head Light



技术参数

输入功率: AC100~240V 50/60 Hz
功率: 70W
LED光源: 1 PCS 10W RGBW
CREE LED和4颗10W RGBW LED
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
调光: 0~100%线性调光, 平滑无闪烁.
效果: 水平/垂直: X轴540° , Y轴无限旋转
DMX通道: 17 / 23CH
控制模式: DMX512/主从/自动运行/声音。
8个内部程序, 声音模式可以通过DMX 512进行控制。
光束角度: 3° / 25°
防护等级: IP20
净重: 2.5kgs
毛重: 3.5kgs
产品尺寸: 32.5X25X27cm
包装尺寸: 54X34X29cm (2个)

MF-150YM

明峰新款LED摇头灯
New LED Moving Head Light



技术参数

电压: AC90~240V 50/60Hz
功率: 200W
LED光源: 150W RGBW 4in1 OSRAM LED
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
DMX通道: 7/16通道
水平: 540° & 无限制, 垂直: 270°
频闪: 1~25次/秒, 多种频闪效果
调光: 16BT线性调光0~100% 平滑无闪烁。
内部程序, 声音模式, 可以通过DMX 512进行控制。
光束角度: 4° (可做摇头面光灯)
性能: 采用原装欧司朗灯珠, 稳定耐用, 寿命长, 亮度高, 多功能, 应用范围广,
外壳: 采用ABS防火塑料
防护等级: IP20
可选防水罩防护等级将达到IP44
尺寸: 197 x 147 x 288mm
重量: 3.8kg

MF-0710W

明峰 7颗小摇头 (迷你染色灯)
Mingfeng 7 Small Shaking Heads (mini-stained Lights)



技术参数

电压: AC100~240V 50~60Hz
灯珠: 7颗10W 添鑫LED
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
颜色: 红绿蓝混色
水平/垂直: 水平540° , 垂直270°
频闪: 电子变量1~25次/秒, 多种频闪效果
调光: 电子线性调光0~100%
模式: 声控, DMX512, 自走, 主从
多通道模式
控制通道: 8/13个
防护等级: IP20
包装尺寸: 28x24x27cm
重量: 4.2kg

SPECIFICATIONS

Input power: AC100~240V 50/60 Hz
Power consumption: 55 W
LED: 1 PCS 40W high power RGBW LED
DMX channel: 7 / 16CH
Movement: Pan / Tilt: X axis 540 ° or
Endless rotation, Y axis 180 °
8 internal program, sound mode can control by DMX 512
Beam angle: 3°
N.W: 2.5kgs
G.W: 3.5 kgs
Size: 32.5X25X27Cm cm
Packing size: 54X34X29Cm (2pcs)

SPECIFICATIONS

Input power: AC100~240V 50/60 Hz
Power consumption: 70 W
LED: 1 PCS 10W RGBW
CREE LED and 4 pcs 10W RGBW LED
DMX channel: 17 / 23CH
Movement: Pan / Tilt: X axis 540 ° , Y axis Endless rotation
Control mode: DMX512 / Master-Slave / Auto run / sound
8 internal program, sound mode can control by DMX 512
Beam angle: 3° / 25°
N.W: 2.5kg
G.W: 3.5 kg
Size: 32.5X25X27 cm
Packing size: 54X34X29Cm (2pcs)

SPECIFICATIONS

Voltage: AC90~240V 50/60Hz
Power: 200W
LED Light Source: 150W RGBW 4in1 OSRAM LED
Lamp life: 50000 hours theoretical life, low power consumption.
DMX channel: 7/16 channels
Level: 540° & unlimited, vertical: 270°
Strobe: 1~25 times/second, multiple strobe effects
Adjust light: 16BT linear dimming 0 ~ 100% smooth and no flicker.
Internal program, sound mode, can be controlled by DMX 512.
Beam angle: 4° (can shake head light)
Performance: The original Osram lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications,
Shell: ABS fireproof plastic
Protection class: Ip20
Optional rain cover protection level will reach Ip44
Size: 197 x 147 x 288mm
Weight: 3.8kg

SPECIFICATIONS

Voltage: AC100~240V 50~60Hz
Lamp beads: 7 pieces of 10W Tianxin LED
Lamp life: 50000 hours theoretical life, low power consumption.
Color: red, green and blue
Horizontal/Vertical: Horizontal 540° , Vertical 270°
Strobe: electronic variable 1~25 times / second, a variety of strobe effects
Dimming: Electronic linear dimming 0~100%
Mode: voice, DMX512, self-propelled, master-slave
Multi-channel mode
Control channel: 8/13
Protection class: Ip20
Packing size: 28x24x27cm
Weight: 4.2kg

LED摇头灯系列 LED Moving Head Light Series

帕灯系列 Par Light Series

MF-3603Y

36颗小金刚（染色灯）

3W 36Pcs LED Movig head light
(wash)



MF-1915T

19颗LED调焦摇头灯

19Pcs LED Movig head Zoom Wash Light



MF-1012

明烽LED足球灯

LED Football Light



MF-2515Y

25眼LED摇头矩阵灯

25Eye LED Moving Head Matrix Light



◆ 技术参数 ◆

电压: 100V~240V, 50 / 60Hz; 功率: 200W
光源: 36pcs x 3W 添鑫LED高强度聚光。
(R8, G10, B10, W8)
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
通道: 15国际标准DMX通道, 3种控制模式: DMX信号控制
/主从/声控模式
水平扫描: 540° (16 bit精度扫描)
垂直扫描: 180° (16 bit精度扫描)
频闪: 高速电子调节频闪可达1~25次/秒或随机频闪
调光: 0~100% 总调光通道可同时控制4个主颜色的明暗变化和闭光。
程序: 有8个内置程序可供选择, 可自动运行也可通过外置控台控制
闪光灯速度可调, 闪光速度1~10 F.P.S
双板调光焦点: 线性焦点 (16位)
防护等级: IP20
包装尺寸: 330 x 240 x 360mm
净重: 4.5kg; 毛重: 5kg

◆ SPECIFICATIONS ◆

Voltage: 100V ~240V, 50 / 60Hz; Power: 200W
Light source: 36pcs x 3W Tiam Xin LED high intensity spotlight.
(R8, G10, B10, W8)
Lamp life: 50000 hours theoretical life, low power consumption.
Channels: 15 international standard DMX channels, 3 control modes: DMX signal control/master-slave/sound control mode
Horizontal scan: 540° (16 bit precision scan)
Vertical scan: 180° (16 bit precision scan)
Strobe: High-speed electronically adjusted strobe up to 1~25 times/sec or random strobe
Dimming: 0~100% The total dimming channel can control the brightness and darkness of the 4 main colors and close the light at the same time.
Program: There are 8 built-in programs to choose can be run automatically or through an external console
Adjustable flash speed, flash speed 1~10 F.P.S
Dual Board Dimming Focus: Linear Focus (16bit)
Protection class: Ip20; Packing size: 330 x 240 x 360mm
Net weight: 4.5kg; Gross weight: 5kg

◆ 技术参数 ◆

电压: AC110V~240V, 50/60Hz,
功率: 300W
灯珠: OSRAM 19 x 15W(四合一)
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
线性调节: RGB256 x 256 x 256极无极混色。
调光: 16BT线性调光0~100% 平滑无闪烁。
扫描微调, X/Y轴16BIT扫描细分精确定位
DMX通道: 14/26通道
控制模式: DMX512信号控制模式, 主从控制模式
防护等级: IP20
可选防水罩防护等级将达到IP44
包装尺寸: 415 x 315 x 470mm
净重: 10kg
毛重: 11.7kg

◆ SPECIFICATIONS ◆

Voltage: AC110V~240V , 50/60Hz,
Power: 300W
Lamp beads: OSRAM 19 x 15W (4 in 1)
Lamp life: 50000 hours theoretical life, low power consumption.
Linear adjustment: RGB256 x 256 x 256 poleless color mixing.
Dimming: 16BT linear dimming 0 ~ 100% smooth without flicker.
Scanning fine-tuning, X/Y axis 16BIT scanning subdivision precise positioning
DMX channel: 14/26 channels
Control mode: DMX512 signal control mode, master-slave control mode
Protection class: Ip20
Optional rain cover protection level will reach Ip44
Packing size: 415 x 315 x 470mm
Net weight: 10kg
Gross weight: 11.7kg

◆ 技术参数 ◆

电压: AC90~240V,50/60Hz
功率: 300W
光源: 12颗 CREE RGBW 4in1 LED 灯珠
颜色: RGBW四色
通道模式: 21个通道模式
控制模式: DMX512/主从/声控/自走
调光: 0~100%线性调光
频闪: 1~12次/秒, 或脉冲模式频闪
X轴正反定位旋转, Y轴无极旋转
内置效果模式
包装: 40.5 x 29.5 x 490mm (1台/包)
毛重: 7.5Kg

◆ SPECIFICATIONS ◆

Voltage: AC90~240V, 50/60Hz
Power: 300W
Source: 12pcs CREE RGBW 4in1 LED
Color: RGBW
Channel mode: 21 channels
Control Mode: DMX512/master-slave/sound/auto
Dimming: 0~100% linear dimming
Strobe: 1~12 times/second, or strobe pulse mode
X-axis positioning reverse rotation, Y-axis rotation Promise
Built-in effects mode
Packaging: 40.5 x 29.5 x 490mm (1 units/pack)
GW: 7.5Kg

◆ 技术参数 ◆

电压: AC90~240V 50/60Hz
灯珠: 25颗15W CREE 四合一 灯珠
功率: 450W
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
像素: 25像素 (每个LED为像素), 每个独立可控。
调光: 16BT线性调光0~100% 平滑无闪烁。
控制通道: 112/37/16CH 可转换
控制模式: 自走, 声控, 主从, DMX512
主要功能: LED 单控, 可编辑组成, 数字, 字母, 图像
频闪: 1~25次/秒电子频闪与随机频闪
效果: 水平/垂直: X轴540° 正反定位旋转, Y轴无限旋转
内置效果模式
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高, 多功能, 应用范围广,
外壳: 采用ABS防火塑料
防护等级: IP20
可选防水罩防护等级将达到IP44
产品尺寸: 39*29*49cm
包装尺寸: 53.5*47.5*42cm
净重: 14kg 毛重: 16kg

◆ SPECIFICATIONS ◆

Voltage: AC90~240V 50/60Hz
Lamp Beads: 25pcs 15W CREE 4-in-1 LED
Power: 450W
Lamp life: 50000 hours theoretical life, low power consumption.
Pixels: 25 pixels (each LED as a pixel), each individually controllable.
Adjust light: 16BT linear dimming 0 ~ 100% smooth and no flicker.
Control channel: 112/37/16CH convertible
Beam angle: 10°
Control mode: self-propelled, voice-activated, master-slave, DMX512
Main features: LED single control, editable composition, numbers, letters, images
Strobe: 1~25 times / second electronic strobe and random strobe
Effect: Horizontal/Vertical: X axis 540° positive and negative positioning rotation, Y axis infinite rotation
Built-in effect mode
Performance: The original Cree lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications.
Shell: ABS material of plastic
Protection class: Ip20
Optional rain cover protection level will reach Ip44
Product size: 39*29*49cm
Packing size: 53.5*47.5*42cm
N.W: 14kg G.W: 16kg

MF-1203P

120pcs 3W大功铸铝率帕灯
120pcs 3W High-power
Cast Aluminum LED Par Light



MF-1203M
120pcs 3W大功率 LED帕灯
120pcs 3W High Power LED Par Light



◆ 技术参数 ◆

电压: AC90~240V, 50/60Hz
额定功率: 120W
LED: 3Wx120PCS (40Red/40Green/
40Blue)
控制模式: DMX512, 主从机同步,
单机自走, 声控
通道: 6通道(数码显示)
投光角度: 15°
(30° / 50° 25x6° 可选)
尺寸: 300x300x380mm
重量: 9.5KG

◆ SPECIFICATIONS ◆

Voltage: AC90 ~ 240V, 50/60Hz
Rated Power: 120W
LED: 3Wx120PCS (40Red/40Green/40Blue)
Control Mode: DMX512, master and slave synchronization,
Stand-alone self-propelled, voice-activated
Channel: 6 channel(digital display)
Cast light angle: 15° (30° / 50° 25x6° optional)
Size: 300x300x380mm
Weight: 9.5KG

◆ 技术参数 ◆

额定电压: AC100V~240V, 50HZ/60HZ
额定功率: 400W
光源: 120颗3W高亮大功率LED
驱动电流: 700MA
通道: 3个DMX通道
防水等级: IP20
净重: 11.5kg
毛重: 12.7kg

◆ SPECIFICATIONS ◆

Rated voltage: AC100V~240V, 50HZ/60HZ
Rated power: 400W
Light source: 120pcs 3W high power LED
Drive current: 700MA
Channels: 3 DMX channels
Waterproof rating: Ip20
Net weight: 11.5kg
Gross weight: 12.7kg

◆ 技术参数 ◆

电压: AC90V~240V 50/60 Hz .
功率: 320W ; LED: 90颗3W (RGBW
各12颗, A42颗)
透镜: 25/45/60度可选;
灯珠寿命: 6万~10万小时;
通道: 10/2通道
功能特点: 显色指数>85, 0~100%四种曲
线调光模式选择

◆ SPECIFICATIONS ◆

Voltage: AC90V~240V 50/60 Hz.
Power: 320W; LED: 90pcs 3W (RGBW
12pcs each, A42pcs)
Lens: 25/45/60 degrees optional;
Lamp beads life: 60,000 ~ 100,000 hours;
Channel: 10/2 channels
Functional features: color rendering index> 85,
0~100% four kinds of music
Line dimming mode selection

◆ 技术参数 ◆

额定功率: 300W
光源: 72颗3W RGBW大功率LED
通道: 10个DMX通道
调光: 0~100%线性调节, 会场暖光功能
频闪: 独立电子频闪, 1~25Hz
净重: 4.5kg
毛重: 5.2kg

◆ SPECIFICATIONS ◆

Rated power: 300W
Light Source: 72pcs 3W RGBW High Power LED
Channel: 10 DMX channels
Dimming: 0~100% linear adjustment,
venue warm light function
Strobe: Independent Electronic Strobe, 1~25Hz
Net weight: 4.5kg
Gross weight: 5.2kg

◆ 技术参数 ◆

额定电压: AC100V~240V, 50HZ/60HZ
额定功率: 180W
光源: 54颗3W (RGB 3in1) 大功率LED
驱动电流: 700MA
接收信号: DMX512信号, 带主/从机功能, 内置自走程序
通道: 9个DMX通道
调光: 0~100%线性调节, 会场暖光功能
频闪: 独立电子频闪, 1~25Hz
透镜: 新型25 °珠面透镜, 光效更加均匀
投光角度: 25 °, 45 ° 可选
灯体尺寸: 260 x 290 x 220mm
包装尺寸: 250 x 250 x 310mm
净重: 3.2kg
毛重: 3.7kg

◆ SPECIFICATIONS ◆

Rated voltage: AC100V~240V, 50HZ/60HZ
Rated power: 180W
Light source: 54 3W (RGB 3in1) high power LED
Drive current: 700MA
Receive signal: DMX512 signal,
master/slave function,
built-in auto program
Channel: 9 DMX channels
Dimming: 0~100% linear adjustment, venue warm light
function
Strobe: Independent Electronic Strobe, 1~25Hz
Lens: New 25 bead lens for more uniform light
Projection angle: 25 °, 45 ° Optional
Light body size: 260 x 290 x 220mm
Packing size: 250 x 250 x 310mm
Net weight: 3.2kg
Gross weight: 3.7kg

帕灯系列 Par Light Series

MF-354FP

LED 54颗3W防水帕灯
54pcs 3W Waterproof LED Par Light



技术参数

额定电压: AC100V~240V, 50Hz/60Hz
额定功率: 180W
光源: 54颗3W (R: 12, G18, B: 18, W: 6)
大功率LED
驱动电流: 700mA
接收信号: DMX512信号, 带主/从机功能, 内置自走程序通道; 10个DMX通道
调光: 0~100%线性调节, 会场暖光功能
频闪: 独立电子频闪, 1~25Hz
透镜: 新型25°珠面透镜, 光效更加均匀
投光角度: 15°, 25°, 45° 可选
灯体尺寸: 340 x 340 x 210mm
包装尺寸: 295 x 295 x 345mm
净重: 6.2kg
毛重: 6.6kg

技术参数

电压: AC110~240V 50/60Hz
功率: 200W/180W/220W
光源: 54颗3W LED
调光: 0~100%电子线性调光
频闪: 1~10次/秒 频闪
通道: 7/8CH
控制信号: DMX512
控制模式: DMX512, 主从, 自走
防水等级: IP65
内包装尺寸: 306x262x289mm
外包装尺寸: 325x265x330mm
净重: 9.5KGS
毛重: 10KGS

技术参数

额定电压: AC100V~240V, 50Hz/60Hz
额定功率: 180W
光源: 54颗3W (2700K:36PCS +7000K:18PCS) 大功率LED
驱动电流: 700MA
通道: 3个DMX通道
调光: 0~100%线性调节, 会场暖光功能
频闪: 独立电子频闪, 1~25Hz
灯体尺寸: 260 x 290 x 220mm
包装尺寸: 250 x 250 x 310mm
净重: 3.5kg 毛重: 3.7kg

技术参数

输入电压: AC100~240V;50/60Hz
消耗功率: 162W
灯珠数量: 54颗3W LED灯珠 (R:14颗,G:14颗,B:14颗,W:12颗)
光束角度: 25° 光束角度(15°, 45°, 60° 可选)
控制信号: DMX512,主从机,声控,自走程序
控制通道: 4/8个国际标准DMX通道
净重: 2.4 KG
毛重: 3 KG
产品尺寸: 275*225*325mm
包装尺寸: 255(D)*255(W)*365(H)mm
外箱尺寸: 800(D)*540(W)*390(H)mm (6-in-1)

MF-5403P

54颗3W帕灯
3W LED 54Pcs Par Light



技术参数

输入电压: AC90~245V/50/60Hz
功率: 200W
光源: 18颗8WRGB 或者RGBY高亮度LED
颜色: 1670万种颜色变化
控制: DMX512, 主从控制、自走
通道: 7通道 (数码显示)
1: 开光; 2: 红; 3: 绿; 4: 蓝; 5: 白; 6: 功能选择;
7: 功能速度 (通道可以根据客户要求定制)
特征: 2个支架提手, 可自支撑, 可悬挂。
分体设计, 机身全铸铝, 温度保护, 安全可靠。
独有光学系统设计, 均匀的色斑效果。
超高频 (64KHz) 调光技术, 绝无抖动闪。
尺寸: 200 x 270 x 220mm
净重: 3kg
毛重: 3.5kg

MF-2412P

18/24颗4/5合1扁帕
18/24Pcs 4/5 In 1 LED Flat Light



SPECIFICATIONS

Rated voltage: AC100V~240V, 50Hz/60Hz
Rated power: 180W
Light source: 54pcs 3W(R:12,G18,B:18,W:6)
High power LED
Drive current: 700MA
Receive signal: DMX512 signal, with master/slave function, built-in self-propelled program
Channel: 10 DMX channels
Dimming: 0~100% linear adjustment, venue warm light function
Strobe: Independent Electronic Strobe, 1~25Hz
Lens: New 25-inch bead lens for more uniform light
Projection angle: 15°, 25°, 45° Optional
Light body size: 340 x 340 x 210mm
Packing size: 295 x 295 x 345mm
Net weight: 6.2kg
Gross weight: 6.6kg

SPECIFICATIONS

Voltage: AC110~240V 50/60Hz
Power Consumption: 200W/180W/220W
Lighting Source: 54pcs*LED 3W
Dimming: 0~100% linear dimming
Strobe: 1~10t/s strobe
Channel: 7/8CH
Control Signal: DMX512
Control Mode: DMX512, Automatic, Sound activated, and Master-slave
IP rate: Ip65
Inner Packing Size: 306x262x289mm
Outer Packing Size: 325x265x330mm (4PCS/CTN)
Net Weight: 9.5KGS
Gross Weight: 10KGS(6.5KGS/PCS)

SPECIFICATIONS

Rated voltage: AC100V~240V, 50Hz/60Hz
Rated power: 180W
Light source: 54 3W (2700K: 36PCS +7000K: 18PCS)
high power LED
Drive current: 700MA
Channel: 3 DMX channels
Dimming: 0~100% linear adjustment, venue warm light function
Strobe: Independent Electronic Strobe, 1~25Hz
Light body size: 260 x 290 x 220mm
Packing size: 250 x 250 x 310mm
Net weight: 3.5kg Gross weight: 3.7kg

SPECIFICATIONS

Input Voltage: AC100~240V,50/60Hz
Power Consumption: 162W
LED Quantity: 54PCS 3W LEDs
(R:14,G:14,B:14,W:12)
Beam Angle: 25° (15, 45°, 60° also available)
Control Signal: DMX512, Master-slave,
Sound,Auto
Control Channel: 4/8 DMX512 channels
NW: 2.4 KG GW: 3 KG
Product Dimensions: 275*225*325mm
Packing Size: 255(D)*255(W)*365(H)mm
Outer Box Size: 800(D)*540(W)*390(H)
mm (6-in-1)

SPECIFICATIONS

Input voltage: AC90~245V/50/60Hz
Power: 200W
Light source: 18pcs 8WRGB or RGBY high-brightness LEDs
Color: 16.7 million color changes
Control: DMX512, master-slave control, self-propelled
Channel: 7 channels (digital display)
1: Opening 2: Red 3: Green 4: Blue 5: White 6 Function selection 7: Function speed (channel can be customized according to customer requirements)
Features: 2 bracket handles, self-supporting, can be hung. Split design, full cast aluminum body, temperature protection, safe and reliable.
Unique optical system design, uniform color effect.
UHF (64KHz) dimming technology, no jitter flash.
Size: 200 x 270 x 220mm
Net weight: 3kg
Gross weight: 3.5kg

MF-2412TP

24颗LED变焦染色帕灯
24pcs LED Zoom Wash Par Light



技术参数

电源输入: AC100~240V 50/60Hz
最大功率: 250W
光束发散角: 25° DMX 通道: 3/7 通道
光源: 24颗x10W/15W (4in1,5in1)
控制模式: DMX, 自动运行
操作模式: 主从机同步, 单机自走, 声控
信号输入/输出: 3针卡隆座
灯体尺寸: 长 220x宽220x高340mm
灯壳材料: 压铸铝
重量: 5kgs 毛重: 6kg
包装尺寸: (6台/箱)L87xW59xD34cm

SPECIFICATIONS

Power input: AC100~240V 50/60Hz
Maximum power: 250W Beam divergence angle: 25°
DMX channel: 3/7 channel
Light source: 24 x10W / 15W (4in1,5in1)
Protocol: USITT DMX-512
Control mode: DMX, automatic operation
Operating mode: master and slave synchronization, stand-alone self-propelled, voice-activated
Signal input / output: 3-pin cradle
Lamp body size:(D)20x(W)220x(H) 340mm
Lamp housing material: die-cast aluminum
Weight: 5kg ; Gross weight: 6kg
Packing size: (6 units / box) L87xW59xD34cm

MF-1912TP

19颗LED防水变焦染色帕灯
19pcs LED Waterproof Zoom LED Par Light



技术参数


输入电压: AC100~240V, 50/60Hz
功率: 250W
LED数量: 19PCS 12W 6IN1
RGBWA + UV LED
控制通道: 9个DMX512通道
防水等级: IP65
毛重: 13.5KG
包装尺寸: 320 * 320 * 380mm

SPECIFICATIONS

Input Voltage: AC100~240V, 50/60Hz
Power Consumption: 250W
LED Quantity: 19PCS 12W 6IN1
RGBWA+UV LED
Control Channel: 9 DMX512 channels
IP rate: Ip65
GW: 13.5KG
Packing Size: 320*320*380mm

MF-1914TP

19颗LED调焦染色帕灯 (不防水)
19pcs LED Pac Light

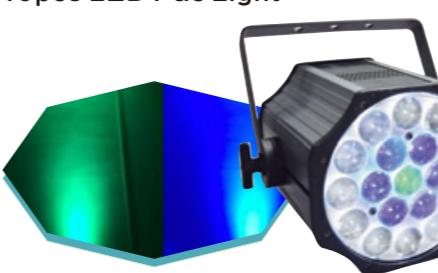

技术参数

输入电源: AC100~240V 50/60Hz
功率: 300W
光源: 19 * 6in1 15w RGBW + UV
DMX通道: 9CH
变焦: 20~60°
毛重: 6KG
尺寸: 27*27*40.5厘米

SPECIFICATIONS

Input Power:AC100~240V 50/60Hz
Power Consumption: 300W
Light Source: 19*6in1 15w RGBW+UV
DMX Chanle: 9CHs
Zoom:20~60°
G.W:6KG
Size:27*27*40.5cm

MF-1801P

18颗塑料扁帕灯
18Pcs Plastic Flat LED Par Light



技术参数

电压: AC110V/220V 50/60Hz
额定功率: 30W
光源: 18pcsx1W LED灯珠
发光角度: 15° ~ 60° 可选
控制模式: dmx512, 声控, 自走, 主从
内包装尺寸: 230x230x165mm
外包装尺寸: 480x480x550mm (12台装)
重量: 2KG

SPECIFICATIONS

Voltage: AC110V / 220V 50/60Hz
Rated power: 30W
Light source: 18pcsx1W LED
Beam angle: 15° ~ 60° optional
Control mode: dmx512, sound auto, master-slave
Inner packaging size: 230x230x165mm
Outer package size: 480x480x550mm (12 sets)
Weight: 2KG

MF-1815P

18颗4/5/6IN1全彩帕灯
18pcs 4/5/6IN 1Full Color LED PAR Lights



技术参数

电压: AC110V/220V 50/60Hz
额定功率: 200W
光源: 18pcs*10W 4in1 全彩LED
发光角度: 15° / 25° / 45° 高级
光学透镜可选
控制模式: 自走、声控、DMX
DMX通道: 8CH
内包装尺寸: 255x255x380mm
外包装尺寸: 540x530x400mm
重量: 4KG

SPECIFICATIONS

Voltage: AC110V / 220V 50/60Hz
Rated power: 200W
Light source: 18pcs * 10W 4in1 full color LED
Beam angle: 15° / 25° / 45° high
Optical lens optional
Control mode: Auto, Sound, DMX
DMX channel: 8CH
Inner packing size: 255x255x380mm
Outer packing size: 540x530x400mm
Weight: 4KG

帕灯系列 Par Light Series

MF-1812TP
18颗LED防水变焦染色帕灯
18pcs Waterproof Zoom LED Par Light



技术参数

输入电压: AC100~240V, 50/60Hz
功率: 250W
LED数量: 18PCS 12W 6IN1
RGBWA + UV LED
控制通道: 9个DMX512通道
防水等级: IP65
毛重: 13.5KG
包装尺寸: 320*320*380mm

SPECIFICATIONS

Input Voltage: AC100~240V, 50/60Hz
Power Consumption: 250W
LED Quantity: 18PCS 12W 6IN1
RGBWA+UV LED
Control Channel: 9 DMX512 channels
IP rate: Ip65
GW: 13.5KG
Packing Size: 320*320*380mm

MF-1815FP
18颗LED防水染色帕灯
18pcs LED Waterproof LED Par Lights



技术参数

LED数量: 18pcs * 12W R, G, B, WA
WA 5IN1 led
额定功率: 250W
输入电压: AC 100~240V 50 / 60Hz
DMX频道: 5 / 8CH
色温: 20° 40° 60° 可选
外形尺寸: 270x256x310mm
毛重: 6公斤
防护等级: IP65

SPECIFICATIONS

LED QTY:18pcs*12W R,G,B,WA
5IN1led
Rated Power:250W
Input Voltage:AC 100~240V 50/60Hz
DMX Channels:5/8CH
Color Temperature:20° 40° 60°
selectable
Dimensions:270x256x310mm
Gross Weight:6kg
protect level:IP65

MF-1201P
12颗 LED塑料帕灯
12PCS Plastic LED PAR Light



技术参数

电压: AC90~240V 50/60HZ
总功率: 50W
光源: 12颗1W/3W
通道: 6通道
控制模式: DMX512, 自走, 声控, 主从模式
外壳材质: 塑料
使用寿命: 60,000~100,000 (小时)
光束角度: 25° , 45° , 60° 可选
净重: 1.2KG

SPECIFICATIONS

Voltage: AC90~240V 50/60HZ
Power: 50W
Light source: 12PCSx1W/3W
Channel: 6CH
Control Model: DMX512, AUTO, SOUND,
MASTER-SLAVE
Case raw-material: Plastic
LED life: 60,000~100,000 (hours)
Optic angle: 25° , 45° , 60° can choose
NW:1.2KG

MF-1215FP
12颗LED防水染色帕灯
12pcs Waterproof LED Par Lights



技术参数

电源: AC100~240V 50/60Hz
功率: 180W
光源: OSRAM 12pcs 15w rgbwa + uv 6合1
(可选四合一, 五一红绿蓝白琥珀)
调光: 16BT线性调光 0 ~ 100% 平滑无闪烁。
频闪: 0 ~ 25/s
最佳投射距离: 4~30米
通道: 9CH
控制模式: DMX512信号控制模式,
主从模式
(多台同步) 带自走程序声控模式。
防护等级: Ip54

SPECIFICATIONS

Power supply: AC100~240V 50/60Hz
Power: 180W
Light source: OSRAM 12pcs 15w rgbwa + uv 6 in 1
(Optional 4 in 1, 5 in 1 red, green, blue, and white amber)
Dimming: 16BT linear dimming 0 ~ 100% smooth without
flicker.
Strobe: 0 ~ 25/s
Best throw distance: 4~30 meters
Channel: 9CH
Control mode: DMX512 signal control mode,
Master-slave control mode;sounds,auto
Protection class: Ip54

MF-0901P
明烽 9+1 LED帕灯
9+1 LED Par Light



技术参数

电压: AC90~240V 50/60HZ
总功率: 80W
光源: 9颗x3W (红绿蓝3合1) +1颗x30W
(红绿蓝3合1)
通道: 6通道
控制模式: DMX512, 自走, 声控, 主从模式
外壳材质: 塑料
使用寿命: 60,000~100,000 (小时)
光束角度: 25° , 45° , 60° 可选
净重: 2KG

SPECIFICATIONS

Voltage: AC90~240V 50/60HZ
Power: 80W
Light source: 9PCsx3W (RGB3IN1)+
1PCsx30W(RGB3IN1)
Channel: 6H
Control Model: DMX512, AUTO,
SOUND, MASTER-SLAVE
Case raw-material: Plastic
LED life: 60,000~100,000 (hours)
Optic angle: 25° , 45° , 60°
can choose
N.W:2KG

MF-0915FP
明烽 9颗LED防水染色帕灯
9 LED Pcs Waterproof Par Lights



技术参数

电源: AC100~240V 50/60Hz
功率: 150W
光源: OSRAM 9pcs 15w rgbwa + uv 6合1
(可选五合一, 四合一红绿蓝白琥珀)
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
功能效果: 调光、频闪、流水、渐变
调光: 16BT线性调光 0 ~ 100% 平滑无闪烁。
频闪: 0 ~ 25/s; 最佳投射距离: 4~30米
电流: 700mA; 通道: 8CH
防水等级: IP65; 毛重: 6.5KG
包装尺寸: 240*240*280mm
包装尺寸: 760*510*310mm (6合1)

SPECIFICATIONS

Power supply: AC100~240V 50/60Hz
Power: 150W
Light source: OSRAM 9pcs 15w rgbwa + uv 6 in 1
(Optional five-in-one, four-in-one red, green, blue
and white amber)
Lamp life: 50000 hours theoretical life, low power
consumption.
Functional effects: dimming, strobe, running water,
gradient
Dimming: 16BT linear dimming 0 ~ 100% smooth
without flicker;Strobe: 0 to 25/s
Best throw distance: 4~30 meters
Current: 700mA;Channel: 8CH
Waterproof rating: Ip65;Gross weight: 6.5KG
Packing size: 240*240*280mm
Packing size: 760*510*310mm (6 in 1)

MF-0715FP
7颗防水帕灯
7pcs Waterproof LED Par Light



技术参数

电压: AC90~240V 50 / 60Hz
功率: 100W
光源: 7 / 9PCS * 10W RGBW 4IN1,
RGBWA 5IN1
频道: 8 / 9CH
控制型号: DMX512, 声控, 自动,
主从
外壳原材料: 铝
LED寿命: 50,000 (小时)
视角: 25° , 45° , 60° 可选择
净重: 6.5KG

SPECIFICATIONS

Voltage: AC90~240V 50 / 60Hz
Power: 100W
Light source: 7/9PCS*10W RGBW4IN1,
RGBWA 5IN1
Channel: 8/9CH
Control Model: DMX512, AUTO, SOUND,
MASTER-SLAVE
Case raw-material: Aluminum
LED life: 50,000 (hours)
Optic angle: 25° , 45° , 60° can choose
N.W: 6.5KG

MF-0704P
LED7颗帕灯
LED 7 Par Lights



技术参数

输入电压: AC100~240V, 50/60Hz
功率: 70W
LED数量: 7PCS 10W 4in1 LED
控制信号: DMX512, 声控,
自走, 主从模式
控制通道: 8个DMX512通道
净重: 1KG 毛重: 1.3KG
产品尺寸: 200 * 175 * 225mm
包装尺寸: 200 (D) * 170 (W) * 200 (H) mm
外包装尺寸: 430 (D) * 370 (W) * 440
(H) mm (8-in-1)

SPECIFICATIONS

Input Voltage:AC100~240V,50/60Hz
Power Consumption: 70W
LED Quantity: 7PCS 10W 4in1 LEDs
Control Signal:DMX512,Master-slave,
Sound,Auto
Control Channel: 8 DMX512 channels
NW: 1 KG
GW: 1.3 KG
Product Dimensions:200*175*225mm
Packing Size:200(D)*170(W)*200(H)mm
Out Packing Size: 430(D)*370(W)*440
(H)mm (8-in-1)

MF-0712P
LED7颗帕灯
LED 7 Pcs LED Par Lights



技术参数

电压: 90 ~ 240V AC, 50/60Hz
功率: 90W
光源: 采用大功率10W高亮度LED灯珠,
产品选用原装进口的半导体优质LED芯片。
运行模式: 自走/声控/DMX 512控制/多台联机
通道: 8个国际标准DMX通道
外壳材质: 铸铝
防护等级: IP25

SPECIFICATIONS

Voltage: 90 ~ 240V AC, 50/60Hz
Power: 90W
Light source: High-power 10W high-brightness
LED lamp beads
The product uses the imported high-quality
semiconductor LED chip.
Operating mode: Self-propelled/sound-activated/
DMX 512 control/multiple connections
Channels: 8 international standard DMX channels
Shell material: cast aluminum
Protection class: Ip25

MF-0710P
明烽 7颗四合一帕灯
7Pcs 4 in 1 LED Par Lights



技术参数

输入电压: AC 90V~240V, 50 / 60Hz
工作电压: DC24V
最大消耗功率: 70W
光源: 7颗4in1 10W LED
驱动电流: 500mA
控制信号: DMX512
控制模式: 单机控制模式,DMX模式,主从机
模式通道数: 8CH
颜色效果: R, G, B, W混色
功能效果: 调光、频闪、渐变、RGB彩虹
光束角度: 25° , 45° 可选
净重: 1.7KG
毛重: 2KG
包装尺寸: 20*20*29cm
外箱尺寸: 63*42*31cm(6pcs)

SPECIFICATIONS

Input voltage: AC90V~240V, 50 / 60Hz
Operating voltage: DC24V
Maximum power consumption: 70W
Source: 7pcs 4in1 10W LED
Drive current: 500mA
Control signal: DMX512
Control mode: stand-alone control mode,
DMX mode, the master and slave
Model Number of Channels: 8CH
Color effect: R, G, B, W color mixing
Functional effects: dimming, strobe, fade,
RGB rainbow
Beam angle: 25° , 45° optional
Weight: 1.7KG
G.W: 2KG
Package Size: 20 * 20 * 29cm
Carton Size: 63 * 42 * 31cm (6pcs)

帕灯系列 Par Light Series

MF-0915D
9颗/12颗帕灯
9pcs/12pcs LED Par Light



MF-0912D
明烽 9颗电池帕灯
Mingfeng 9 Pcs Battery Lights



MF-0612D
明烽 6颗电池帕灯
6 Pcs Battery Par Lights



MF-0412D
明烽 4颗电池帕灯
4 Pcs Battery Par Lights



MF-C150R
COB 全彩帕灯
COB Full Color Par Light



技术参数

输入电压: AC100~240V;50/60Hz
消耗功率: 90W/135W/162W
灯珠数量: 9/12颗4IN1/5IN1/6IN1LED灯珠
控制信号: DMX512,主从机,声控,自走程序
控制通道: 4/8CH,5/9CH,6/10CH DMX通道
净重: 3.6 KG 毛重: 4.2 KG
产品尺寸: 265*110*245mm
包装尺寸: 280(D)*155(W)*280(H)mm

SPECIFICATIONS

Input Voltage: AC100~240V,50/60Hz
Power Consumption: 90W,135W,162W
LED Quantity: 9/12PCS 4IN1/5IN1/6IN1 LED
Control Signal: DMX512, Master-slave,
Sound,Auto mode
Control Channel: 4/8CH,5/9CH
6/10CH DMX channels
NW: 3.6 KG GW: 4.2 KG
Product Dimensions:265*110*245mm
Packing Size: 280(D)*155(W)*280(H)mm

技术参数

输入电压: AC90~240V, 50 / 60Hz
功率: 90W / 180W
LED光源: 9pcs * 12W 6in1RGBWA + UV LED
控制通道: 4 / 8CH (4in1), 5 / 9CH (5in1),
6 / 10CH (6in1) DMX通道
净重: 4.2 KG
GW: 4.9 KG
包装尺寸: 295* 190* 320mm
外箱尺寸: 540* 540* 365mm (4合1)

SPECIFICATIONS

Input Voltage: AC90~240V, 50/60Hz
Power Consumption: 90W/180W
LED Quantity: 9pcs*12W 6in1 RGBWA+UV LED
Control Channel: 4/8CH(4in1),5/9CH(5in1),
6/10CH(6in1) DMX channels
NW: 4.2 KG
GW: 4.9 KG
Packing Size: 295(D)*190(W)*320(H)mm
Outer box Size: 540(D)*540(W)*365(H)mm (4 in 1)

技术参数

电源: AC110V~250V 50/60Hz
功率: 100W
光源: 6pcs 12W高亮度5合一
光束: 18°
控制通道: 5/9 chs
包装尺寸: 235 * 210 * 230mm
净重: 3.8kg
毛重: 4kg

SPECIFICATIONS

Voltage: AC110V~250V
Frequency: 50/60Hz
Power consumption: 100W
Light source: 6pcs 15W high
brightness 5 in 1 led
LED angle: 18°
Control channels: 5/9 chs
Packing size: 235*210*230mm
N.W: 3.8kg
G.W: 4kg

技术参数

电源: AC110V~250V 50/60Hz
功率: 100W
光源: 4 * 12W 6-IN-1 LED
光度角度: 18°
控制通道: 5/9 chs
包装尺寸: 235*210*230mm
毛重: 3.8kg

SPECIFICATIONS

Voltage: AC110V~250V
Frequency: 50/60Hz
Power consumption: 100W
Light source: 4*12W 6-IN-1 LEDs
LED angle: 18°
Control channels: 5/9 chs
Packing size: 235*210*230mm
G.W: 3.8kg

技术参数

电压: AC100~240V, 50/60Hz
功率: 150W
光源: COB 100W UV
通道: 3/6CH
光束角度: 40° ,80°
毛重: 4.5KG
尺寸: 81*54*40.5cm (6个/箱)

SPECIFICATIONS

Voltage:AC100~240V, 50/60Hz
Consumption: 150W
Light source: COB 100W UV
Channel: 3/6CH
Beam angle, field angle: 40° ,80°
G.W:4.5KG
Size:81*54*40.5cm (6pcs/CTN)

MF-C400FG
4眼400W COB面光灯防水款
4 Eye 400W Waterproof COB LED Light




MF-C400G
明烽COB观众灯
COB Audience Light



MF-C200G
明烽COB观众灯
COB Audience Light



MF-C200FM
200W防水款COB
200W Waterproof COB

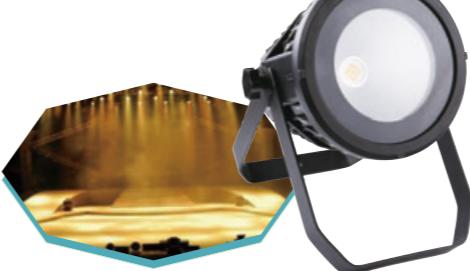

MF-C150FM
COB防水帕灯
COB Waterproof Par Light



COB系列 COB Series

技术参数

电压: AC110V/220V 50/60HZ
功率: 450W
通道: 4/8CH
通道控制, 声控, 自走, 主从同步
防水等级: IP5级
光源: 4颗100W超高亮大功率COB灯珠
(暖白加正白/正白/暖白可以选择)
发光角度: 反光杯

SPECIFICATIONS

Voltage: AC110V / 220V 50 / 60HZ
Power: 450W
Channel: 4 / 8CH
Channel control, sound,
auto, master-slave
synchronization
Waterproof rating: IP5 level
Light source: 4 100W super bright
high power COB lamp beads
(Warm white plus white / white /
warm white can choose)
Beam angle: reflective cup

技术参数

LED-COB观众灯400W (白光/暖白二合一)
输入电压:AC100V~240V, 50/60Hz
额定功率: 450W
LED光源: 4*100W COB 2合1 (正白+暖白)
色温:3200K~ 6500K
灯珠控制: 单颗点控
灯珠寿命:60,000 小时
通道数量:6/12CH
调光:0~100% 线性调光
光束角度:38°
控制模式: DMX512, 主从机, 声控及自走模式
散热方式: 通过风机和散热片对流冷却
防护等级: IP20

SPECIFICATIONS

LED-COB Audience Light 400W (white/warm white combo)
Input voltage: AC100V~240V, 50/60Hz
Rated power: 450W
LED light source: 4*100W COB 2 in 1
(positive white + warm white)
Color temperature: 3200K~ 6500K
Lamp Bead Control: Single Point Control
Lamp beads life: 60,000 hours
Number of channels: 6/12CH
Dimming: 0~100% linear dimming
Beam angle: 38°
Control mode: DMX512, master slave,
voice control and self-propelled mode
Heat dissipation: Convection cooling through
fan and heat sink
Protection class: Ip20

技术参数

LED-COB观众灯200W (白光/暖白二合一)
输入电压AC100V~240V, 50/60Hz
额定功率: 250W
LED光源: 200W COB 2合1 (正白+暖白)
灯珠寿命: 60000 小时
色温: 3200~6500K
控制模式: DMX512, 主从机, 声控及自走模式
通道数量: 4/8CH
调光: 0~100% 线性调光
光束角度: 25°
菜单显示: LCD数码显示
散热方式: 通过风机和散热片对流冷却
防护等级: IP20

SPECIFICATIONS

LED-COB audience light 200W (white/warm white combo)
Input voltage AC100V~240V, 50/60Hz
Rated power: 250W
LED light source: 200W COB 2 in 1 (positive white + warm white)
Lamp bead life: 60000 hours
Color temperature: 3200~6500K
Control mode: DMX512, master slave, voice control and self-
propelled mode
Number of channels: 4/8CH
Dimming: 0~100% linear dimming
Beam angle: 25°
Menu display: LCD digital display
Heat dissipation: Convection cooling through fan and heat sink
Protection class: Ip20

技术参数

电压: AC90~245V 50/6Hz
灯珠: COB 200W
颜色: 白光, 暖光
通道: 3CH
控制模式: DMX512、声控、自走、主从
净重: 5.5Kg
毛重: 6kg

SPECIFICATIONS

Voltage: AC90~245V 50/6Hz
Lamp beads: COB 200W
Color: white, warm light
Channel: 3CH
Control mode: DMX512, sound, master and slave
N.W: 5.5Kg
G.W: 6kg

技术参数

输入电压: AC90~260V, 50Hz/60Hz
LED灯: 200W RGBW 4 IN 1 COB LED
控制模式: DMX, 主/从, 声控, 自走
DMX频道: 7CH
透镜角度: 60°
最大功率: 250W
IP : 65
毛重: 10公斤

SPECIFICATIONS

Input Voltage: AC90~260V, 50Hz/60Hz
LED Lamp: 200w RGBW 4 IN 1 COB LED
Control Mode :DMX ,Master/Slave ,
Sound-active ,Auto-run
DMX Channel:7CH
Lens Angle:60°
Max power:250W
IP:65
Gross Weight: 10kg

MF-C200M
200W COB
200W COB



MF-C100M/C180M
100W/200W COB面光灯
100W/200W COB Surface Light



MF-3110W
LED 车展灯
LED Outdoor Light



MF-200TM/300TM
200W/300W电子调焦面光灯
200W/300W Electronic Focus Surface Light



技术参数

光源: 1颗200W LED灯珠
总光量: 200W
镜头角度: 35°, 75° 可选
频闪: 1-10次/秒
模式: DMX512, 自走式, 主从
通道: 6个DMX通道
尺寸: 215x215x310mm
净重: 3kg

SPECIFICATIONS

Light source: 200W LED
Total light: 200W
Lens angle: 35°, 75° optional
Strobe: 1-10 times / second
Mode: DMX512, auto,
master-slave
Channels: 6 DMX channels
Size: 215x215x310mm
N.W: 3kg

MF-J200W
200WLED影视聚光灯
200WLED Video Spotlight



技术参数

输入电压: AC100~240V, 50/60Hz
功率: 250W
光源: 200W高显指COB LED灯珠。
光源寿命: 100000 小时
色温: 3200K, 5600K可选。
控制面板: LCD液晶显示+四按键
调光: 0~100%线性调光。
通道模式: 1CH/2CH。
控制模式: DMX512控制/手动控制。
工作温度: -25°C ~ +45°C
保护等级: IP20
产品尺寸: 455*265*292MM
包装尺寸: 485*385*425MM
净重/毛重: 6.2KG/7.8KG

SPECIFICATIONS

Input voltage: AC100~240V, 50/60Hz
Power: 250W
Light source: 200W high indicates COB LED lamp beads.
Light source life: 100000 hours
Color temperature: 3200K, 5600K optional.
Control panel: LCD liquid crystal display + four buttons
Dimming: 0~100% linear dimming.
Channel mode: 1CH/2CH.
Control mode: DMX512 control/manual control.
Working temperature: -25°C ~ +45°C
Protection level: Ip20
Product Size: 455*265*292MM
Packing size: 485*385*425MM
Net weight/gross weight: 6.2KG/7.8KG


技术参数

光源: 200W LED灯珠
总光量: 200W
镜头角度: 35°, 75° 可选
频闪: 1-10次/秒
模式: DMX512, 自走式, 主从
通道: 6个DMX通道
尺寸: 215x215x310mm
净重: 3kg

SPECIFICATIONS

Light source: 200W LED lamp beads
Total light: 200W
Lens angle: 35°, 75° optional
Strobe: 1-10 times / second
Mode: DMX512, auto,
master-slave
Channels: 6 DMX channels
Size: 215x215x310mm
N.W: 3kg

MF-J300W
电子变焦300W LED聚光灯
300W Electronic Zoom LED Spotlight

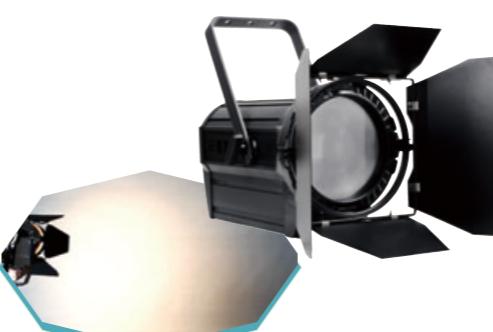

技术参数

输入电压: AC100~240V, 50/60Hz
功率: 350W
光源: 300W进口高亮度高显指COB灯珠。
光源寿命: 50000 小时
色温: 3000K~6000K可调。
控制面板: LCD液晶显示+四按键
调光: 0~100%线性调光。
通道模式: 3CH/4CH。
控制模式: DMX512控制/手动控制。
工作温度: -25°C ~ +45°C
保护等级: IP20
产品尺寸: 425*375*375MM
包装尺寸: 485*425*425MM
净重/毛重: 4.8KG/6KG

SPECIFICATIONS

Input voltage: AC100~240V, 50/60Hz
Power: 350W
Light Source: 300W imported high brightness high display COB lamp beads.
Light source life: 50000 hours
Color temperature: 3000K~6000K adjustable.
Control panel: LCD liquid crystal display + four buttons
Dimming: 0~100% linear dimming.
Channel mode: 3CH/4CH.
Control mode: DMX512 control/manual control.
Working temperature: -25°C ~ +45°C
Protection level: Ip20
Product Size: 425*375*375MM
Packing size: 485*425*425MM
Net weight/gross weight: 4.8KG/6KG

技术参数

电源: AC90~260V 50/60Hz
功率: 350W
LED: (1) 31pcs 10W白光LED
DMX通道: 2
IP防护等级: IP20
尺寸: 280 x 280 x 380mm
净重: 7KG
毛重: 9KG

SPECIFICATIONS

Power: AC90~260V 50/60Hz
Power consumption: 350W
LED: (1) 31pcs 10W white LED
DMX channels: 2
IP rating: Ip20
Size: 280 x 280 x 380mm
N.W: 7KG
G.W: 9KG

MF-J250W
300W LED 聚光灯 (可调色温)
300W LED Spotlight



技术参数

输入电压: AC100~240V, 50/60Hz
功率: 350W
光源: 高显指COB 300W LED灯珠
显色指数: Ra>94
光源寿命: 100000 小时
色温: 3000K~6000K可调。
控制面板: LCD液晶显示+四按键
光束角度: 15~60 degrees Manual zoom
Dimming: 0~100% linear dimming.
通道模式: 3CH/4CH.
控制模式: DMX512控制/手动控制。
工作温度: -25°C ~ +45°C
产品尺寸: 455*265*292MM
净重/毛重: 6.2KG/7.8KG

SPECIFICATIONS

Input voltage: AC100~240V, 50/60Hz
Power: 350W
Light Source: COB 300W LED
Color rendering index: Ra>94
Light source life: 100000 hours
Color temperature: 3000K~6000K adjustable.
Control panel: LCD liquid crystal display + four buttons
Beam angle: 15~60 degrees Manual zoom
Dimming: 0~100% linear dimming.
Channel mode: 3CH/4CH.
Control mode: DMX512 control/manual control.
Working temperature: -25°C ~ +45°C
Product Size: 455*265*292MM
Net weight/gross weight: 6.2KG/7.8KG

技术参数

额定电压: AC100~240V, 50/60Hz
额定功率: 400W
光源: 集成300W灯珠白光/暖白可选, 高显指LED。
使用寿命: 50000小时
外壳: 耐高温型材+塑料阻燃+金属, IP20
调光: 0~100% 频闪: 0~20Hz
电动调焦: 20~60°
通道: 4通道
控制模式: DMX, 自走, 主从, 声控

SPECIFICATIONS

Rated voltage: AC100~240V, 50/60Hz
Rated power: 400W
Light source: Integrated 300W lamp bead
white/warm white optional, high LED.
Service life: 50000 hours
Shell: High temperature profile + plastic
flame retardant + metal, Ip20
Dimming: 0~100% Strobe: 0~20Hz
Electric focusing: 20~60°
Channel: 4 channels
Control Mode: DMX, auto,
Master-slave, sound

MF-CX100W/150W
LED定焦成像灯 (经济版)
LED Fixed Focus Imaging Lamp
(economy Vision)



技术参数

电源输入: AC100~240V 50/60Hz
电源消耗功率: 150W
LED光源: COB白光100W/150W
灯珠: 正白、暖白、彩色
色温: 3200K~(6500K可选)
调光: 0~100%调光
光学材料: 光学玻璃透镜组
DMX通道: 2 DMX通道 彩色: 7通道(RGBW)
控制: LCD显示屏
光束角度: 19度/26度可选择
信号输入输出: 3P-XLR输入/输出, DMX512信号
防水等级: IP20
外壳材料: 压铸铝, 体积比较小, 比较轻。
工作环境温度: -20° ~ 40°
净重: 6.8KG, 毛重: 7.8KG
灯具尺寸: 240*240*570MM
包装尺寸: 280*280*640MM

SPECIFICATIONS

Power input: AC100~240V 50/60Hz
Power consumption: 150W
LED light source: COB white 100W/150W
Lamp beads: white, warm white, color
Color temperature: 3200K~(6500K optional)
Dimming: 0~100% dimming
Optical Material: Optical Glass Lens Set
DMX channel: 2 DMX channels Color: 7 channels (RGBW)
Control: LCD display
Beam angle: 19 degrees/26 degrees selectable
Signal input/output: 3P-XLR input/output, DMX512 signal
Waterproof rating: Ip20
Shell material: Die-cast aluminum,
relatively small size, lighter.
Working environment temperature: -20° ~ 40°
Net weight: 6.8KG, gross weight: 7.8KG
Lighting size: 240*240*570MM
Packing size: 280*280*640MM

MF-CX200W

新款LED定焦成像灯(高亮板)
New LED Focus Imaging Light (highlighted Board)

**MF-CX300G**

新款LED定焦成像灯
New LED Focus Imaging Light

**MF-CX400W**

新款LED定焦成像灯(专业板)
New LED Focus Imaging Lamp (Professional Vision)

**MF-CX200T**

新款LED调焦成像灯
New LED Focusing Imaging Light

**MF-CX300T**

新款LED调焦成像灯
New LED Focusing Imaging Light

**技术参数**

灯泡: 200W LED
电源: AC100V~250V, 50HZ/60HZ
消耗功率: 200W
控制通道: 2通道、
彩色: 7通道
512控制信号
灯珠: 正白、暖白、彩色
体积比较小, 比较轻
高质量的光学系统
不同的透镜可选 (19° / 26° / 36° / 50°)
重量: 7.5kg

技术参数

输入电压: AC100~240V, 50HZ/60HZ
额定功率: 250W
LED光源: 白色200W COB LED进口灯珠 (3200K, 6500K可选) 正白、暖白
DMX通道: 2CH
光学材料: K9四镜聚焦
通道: 2通道
光学角度: 19度、26度、36度、50度可供选择
调光: 0~100%调光
控制: 手动控制, DMX512控制模式
净重: 9.3KG
毛重: 10.5KG
灯具尺寸: 340*270*630MM
包装尺寸: 350*350*670MM

技术参数

输入电压: AC100~240V, 50HZ/60HZ
额定功率: 450W
LED光源: 400W COB LED添鑫灯珠 (3200K, 6500K可选) 正白、暖白
DMX通道: 2CH
光学材料: K9七镜聚焦
通道: 2通道
光学角度: 19度、26度、36度、50度可供选择
调光: 0~100%调光
控制: 手动控制, DMX512控制模式
净重: 10.5KG
毛重: 12.4KG
灯具尺寸: 340*270*710MM
包装尺寸: 350*350*750MM

技术参数

电压: AC100~240V 50/60Hz
功率: 250W
LED光源: 200W COB LED (3200K / 6500K 可选)
DMX通道: 3个DMX通道
调光: 0~100%调光
光束角度: 变焦17°~50° 手动调焦
光学材料: K9四镜聚焦
尺寸: 61.5*28*21.5cm
重量: 10.4kg

技术参数

输入电压: AC100~240V, 50HZ/60HZ
额定功率: 350W
光学材料: K9四镜聚焦
LED光源: 300W COB LED (3200K / 6500K可选)
通道: 2通道
光学角度: 15~40度 手动调焦
调光: 0~100%调光
控制: 手动控制, DMX512控制模式
净重: 12.8KG
毛重: 14.2KG
灯具尺寸: 305*243*765MM
包装尺寸: 305*355*825MM

SPECIFICATIONS

Lamp: 200W LED
Power: AC100V~250V, 50HZ / 60HZ
Power consumption: 200W
Control Channel: 2 channels.
Colour: 7 Channel
512 control signal
Lamp beads: white, warm white, colorful
Volume is relatively small, relatively light
High quality optical system
Different lens options (19° / 26° / 36° / 50°)
Weight: 7.5kg

SPECIFICATIONS

Input voltage: AC100~240V, 50HZ/60HZ
Rated power: 250W
LED Light Source: White 200W COB LED Lamp Beads (3200K, 6500K optional) white, warm white
DMX channel: 2CH
Optical material: K9 four-mirror focusing
Channel: 2 channels
Optical angle: 19 degrees, 26 degrees, 36 degrees, 50 degrees to choose from
Dimming: 0~100% dimming
Control: manual control, DMX512 control mode
Net weight: 9.3KG
Gross weight: 10.5KG
Lamp size: 340*270*630MM
Packing size: 350*350*670MM

SPECIFICATIONS

Input voltage: AC100~240V, 50HZ/60HZ
Rated power: 450W
LED light source: 400W COB LED Tian Xin (3200K, 6500K optional) white, warm white
DMX channel: 2CH
Optical Material: K9 Seven-Mirror Focus
Channel: 2 channels
Optical angle: 19 degrees, 26 degrees, 36 degrees, 50 degrees to choose from
Dimming: 0~100% dimming
Control: manual control, DMX512 control mode
Net weight: 10.5KG
Gross weight: 12.4KG
Lamp size: 340*270*710MM
Packing size: 350*350*750MM

SPECIFICATIONS

Power Supply: AC100~240V 50/60Hz
Power Consumption: 250W
LEDs: 200W COB LED (3200K/6500K)
DMX channels: 3 DMX Channels
Beam Angle: Zoom 17° ~50°
size: 61.5*28*21.5cm
Weight: 10.4kg

SPECIFICATIONS

Input voltage: AC100~240V, 50HZ/60HZ
Rated power: 350W
Optical material: K9 four-mirror focusing
LED light source: 300W COB LED (3200K / 6500K optional)
Channel: 2 channels
Optical angle: 15~40 degrees Manual focusing
Dimming: 0~100% dimming
Control: manual control, DMX512 control mode
Net weight: 12.8KG
Gross weight: 14.2KG
Lamp size: 305*243*765MM
Packing size: 305*355*825MM

MF-S288K/MF-S432K


MF-S1500K
LED平板柔光灯
LED Flat Soft Light

**技术参数**

电压: AC100~240V 50/60HZ
保险丝: 1.5A 功率: ≥180W
色温: 2700~5500K (可调)
高流明: 24000LM
灯珠φ5: 暖白光1140PCS, 正白光360PCS
通道: 3CH
通信协议: USITTDMX-512
调光: 0~100%线性调光平滑无闪烁
显示方式: 4种LED数码显示地址码
保护功能: 过流保护/过压保护/温度保护
数据输入输出: 3芯卡侬座

SPECIFICATIONS

Voltage: AC100~240V 50/60HZ
Fuse: 1.5A Power: ≥180W
Color temperature: 2700~5500K (adjustable)
High lumens: 24000LM
Lamp Beads 5: Warm White Light 1140PCS, White Light 360PCS
Channel: 3CH
Communication Protocol: USITT DMX-512
Dimming: 0~100% linear dimming smooth without flicker
Display release mode: 4 kinds of LED digital display address code
Protection function: overcurrent protection / overvoltage protection / temperature protection
Data input and output: 3-core cartridge

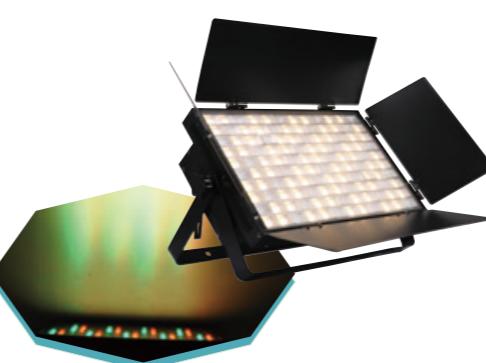MF-S1203
120颗暖光+白光
120 pcs Warm Light + White Light**技术参数**

额定电压: AC100V~240V, 50HZ/60HZ
额定功率: 400W
光源: 120颗3W (3000K80PCS 8000K40PCS)
大功率LED
操作: 显示板控制, 自走/自定义编程
接收信号: DMX512信号, 带主/从机功能, 内置自走程序
通道: 3个DMX通道
调光: 0~100%线性调节, 会场暖光功能
频闪: 独立电子频闪, 1~25Hz
透镜: 新型25°珠面透镜, 光效更加均匀
投光角度: 15°, 25°, 45° 可选
冷却系统: 智能风扇控制系统, 常温工作下0噪音。
外壳: 压铸铝
净重: 4.8kg 毛重: 5.3kg

SPECIFICATIONS

Rated voltage: AC100V~240V, 50HZ/60HZ
Rated power: 400W
Light source: 120pcs 3W (3000K80PCS 8000K40PCS)
high power LED
Operation: Display board control, self-propelled / custom programming
Receive signal: DMX512 signal, with master/slave function, built-in self-propelled program
Channel: 3 DMX channels
Dimming: 0~100% linear adjustment, venue warm light function
Strobe: Independent Electronic Strobe, 1~25Hz
Lens: New 25-inch bead lens for more uniform light
Projection angle: 15°, 25°, 45° Optional
Cooling system: intelligent fan control system, 0 noise at room temperature.
Shell: Die-cast aluminum
Net weight: 4.8kg Gross weight: 5.3kg

MF-1203R
120颗3W天排灯
120 Pcs 3W Cyclorama Lights**技术参数**

额定电压: AC100V~240V, 50HZ/60HZ
额定功率: 400W
光源: 120颗3W RGBW High Power LED
显示界面: 数码管显示
操作: 显示板控制, 自走/自定义编程 接收信号: DMX512信号,
带主/从机功能, 内置自走程序
通道: 10个DMX通道
调光: 0~100%线性调节, 会场暖光功能
频闪: 独立电子频闪, 1~25Hz
透镜: 新型25°珠面透镜, 光效更加均匀
投光角度: 15°, 25°, 45° 可选
冷却系统: 智能风扇控制系统, 常温工作下0噪音。
外壳: 压铸铝
净重: 4.8kg 毛重: 5.3kg

SPECIFICATIONS

Rated voltage: AC100V~240V, 50HZ/60HZ
Rated power: 400W
Light Source: 120pcs 3W RGBW High Power LED
Display interface: digital display
Operation: Display board control, self-propelled/self-programming
Receive signal: DMX512 signal, With master/slave function, built-in self-propelled program
Channel: 10 DMX channels
Dimming: 0~100% linear adjustment, venue warm light function
Strobe: Independent Electronic Strobe, 1~25Hz
Lens: New 25-inch bead lens for more uniform light
Projection angle: 15°, 25°, 45° Optional
Cooling system: intelligent fan control system, 0 noise at room temperature.
Shell: Die-cast aluminum
Net weight: 4.8kg Gross weight: 5.3kg

MF-1080P
1080全彩分段频闪灯
1080 Fullcolor Strobe Light**技术参数**


电压: AC90~240V 50/60Hz
灯珠数量: 1080颗 SMD5050
红绿蓝三合一灯珠
控制模式: DMX 512, 主从机, 声控及自走模式
控制通道: 9/13 DMX通道
功率消耗: 280W
产品尺寸: 480x200x260mm
净重: 6.5kg
毛重: 8.0kg

SPECIFICATIONS

Input Voltage: AC90~260V 50/60Hz
LED Quantities: 1080pcs RGB 3in1 SMD 5050 LED
DMX512, master-slave and sound activated controllable or auto operation
Control Signal: 9/13 DMX Channels
Power Consumption: 280W
Dimensions: 480x200x260mm
Net Weight: 6.5kg
Gross Weight: 8.0kg

MF-J4903

黄金光束矩阵灯
Golden Beam Matrix Light

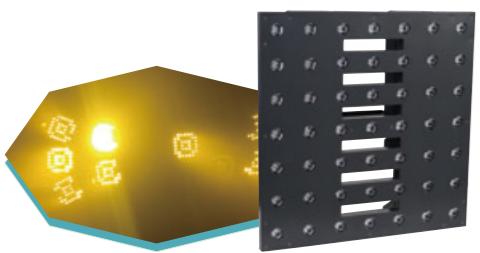


技术参数

电压: AC110 ~ 240V 50Hz/60Hz
光源: 49x3W (CREE琥珀色LED)
控制模式: DMX, 主/从, 声控, 自走
显示屏: 彩色LCD显示屏显示
通道: 5/49/53通道可选;
光束角度: 6°
总功率: 200W
包装尺寸(mm): 600x600x380(2pcs/CTN)
净重: 7KG/PC

MF-J3603

黄金LED光束矩阵灯
Gold LED Beam Matrix Light

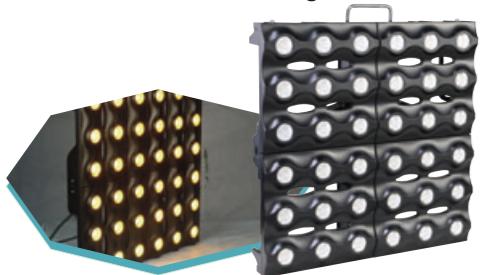

技术参数

电压: AC110 ~ 240V 50Hz/60Hz
光源: 36x3W (CREE琥珀色LED)
控制模式: DMX, 主/从, 声控, 自走;
显示屏: 彩色LCD显示屏显示
通道: 5/36通道可选;
光束角度: 5° ;
总功率: 180W
包装尺寸 (mm): 600x600x380(2pcs/CTN)
净重: 7KG/PCS

MF-1208FT

120 RGBW 4in1 LED城市之光
120 RGBW 4in1 LED City Light



技术参数

输入电压: AC90~140V 60Hz / AC190~240V 50Hz
功率: 1000W
LED光源: 120 * 10W RGBW 4in1 LED
寿命: 50000H
调光: 0~100%
频闪: 1~20times/秒
透镜角度: 45°
DMX控制: 控制: 标准DMX512
信号, 主从, 自动运行
DMX频道: 8/16CH
IP等级: IP55; 效果距离: 60m
外形尺寸: 65*37*54厘米
包装尺寸: 71*57*85cm
N.W: 38kg G.W: 41kg

MF-9608FT

96PCS 4合1 LED城市颜色
96PCS 4 in 1 led city color



技术参数

电压: AC90~250V, 50/60Hz
光源: 96个4合1LED灯珠
控制信号: DMX 512/语音/主/自走
DMX 512通道数量: 4/8/12CH
透镜角度: 15° 25° 35° 45°
防水等级: IP65
户外使用铝合金外壳

MF-7208FT

LED 72颗双层防水投光灯
LED 72Pcs Double Waterproof LED Flood Light



技术参数

输入电压: AC100~240V, 50/60Hz
功耗: 720W
LED数量: 72PCS 10W 4IN1 LED
控制信号: DMX512, 主从,
声控, 自走
控制频道: 4/8/12
DMX512频道
防水等级: IP65
净重: 31公斤
毛重: 53公斤
产品尺寸: 640 * 560 * 430mm
包装尺寸: 740 (D) * 640 (W) * 670 (H) mm
(1合1航空箱)

SPECIFICATIONS

Voltage: AC110 ~ 240V 50Hz/60Hz
Light source: 49x3W (CREE琥珀色LED)
Control Mode: DMX, Master/Slave, sound, auto
Display: Color LCD display
Channel: 5/49/53 channels are optional;
Beam angle: 6°
Total power: 200W
Packing size (mm): 600x600x380 (2pcs/CTN)
Net weight: 7KG/PC

MF-7203T

LED72颗天地排
LED72 World Row



技术参数

输入电压: AC110~240V 50~60Hz
输入功率: 80/220W
光源: 72颗3W高亮度LED
光束角度: 25° /45° /60° 可选
色温: 3200K到6500K
特征: 电流、电压、热度过量保护,
低功率消耗, 高亮度LED
控制信号: DMX512
控制: DMX512 主从, 自走, 声控
通道: 8通道

SPECIFICATIONS

Voltage: AC110 ~ 240V 50Hz/60Hz
Light Source: 36x3W (CREE Amber LED)
Control mode: DMX, master/slave, sound, auto
Display: Color LCD display
Channel: 5/36 channels optional;
Beam angle: 5° ;
Total power: 180W
Packing size (mm): 600x600x380 (2pcs/CTN)
Net weight: 7KG/PCS

MF-108FT

72/108 LED泛光灯
72/108 Pcs LED Flood Light



技术参数

电压: AC90~240V 50/60Hz
LED数量: 72个X 3W RGBW LED
(R: 12pcs / G: 24pcs / B: 24pcs / W: 12pcs)
108pcs X 3W RGBW LED (R: 24pcs
/ G: 28pcs / B: 28pcs / W: 28pcs) 4in1
控制模式: DMX 512, 主/从,
声音激活并自动工作
控制通道: 4/8/12个DMX通道
功耗: 250W / 350W
外形尺寸: 600x240x340mm
净重: 12kg
毛重: 14K

SPECIFICATIONS

Input voltage: AC90~140V 60Hz
/AC190~240V 50Hz
Power: 1000W
LED Source: 120 * 10W RGBW 4in1 led
Life time: 50000H
Dimmer: 0~100%
Strobe: 1~20times/second
Lens angle: 45°
DMX Control: Control: standard DMX512
signal, master-slave, auto-running
DMX channel: 8/16CH
IP Rate: IP55 ; Effect distance: 60m
Dimensions: 65*37*54cm
Packing size: 71*57*85cm
N.W: 38kg G.W: 41kg

MF-4808FT

LED 48颗全彩防水城市之光
48Pcs Full Color Waterproof LED City Light



技术参数

输入电压: AC100~240V, 50/60Hz
功耗: 480W
LED数量: 48PCS 10W 4IN1 LED
控制信号: DMX 512,
主从, 声控, 自走
控制信道: 4/8CH
IP等级: IP65
净重: 12.5公斤
毛重: 14公斤
包装尺寸: 680 (D) * 370 (W) * 280 (H) mm

SPECIFICATIONS

Voltage: AC90~250V, 50/60Hz
Light source: 96 pa 4-in-1 LED
Control signal: DMX 512 / sound / master /
auto
DMX 512 Number of channels: 4/8 / 12CH
Lens angle: 15° 25° 35° 45°
Waterproof rating: IP65
Outdoor use of aluminum alloy shell

MF-3608FT

36颗全彩防水城市之光
36Pcs Full Color Waterproof LED City Light



技术参数

输入电压: AC100~240V, 50/60Hz
功耗: 360W
LED数量: 36PCS 10W 4IN1 LED
控制信号: DMX512, 主从,
声控, 自走
控制通道: 4 / 8DMX512通道
防水等级: IP65
净重: 15公斤
毛重: 32公斤
产品尺寸: 560 * 240 * 410mm
包装尺寸: 680 (D) * 420 (W) * 600 (H) mm
(1合1航空箱)

SPECIFICATIONS

Input Voltage: AC100~240V, 50/60Hz
Power Consumption: 720W
LED Quantity: 72PCS 10W 4IN1 LED
Control Signal: DMX512, sound,auto
Control Channel: 4/8/12
DMX512 channels
Waterproof Grade: Ip65
NW: 31 KG
GW: 53 KG
Product Dimensions: 640*560*430mm
Packing Size: 740(D)*640(W)*670(H)mm
(1-in-1 Flightcase)

MF-2010FT

20颗方形防水投光灯
20Pcs Square Waterproof LED Flood Light



技术参数

电压: AC110~240 50/60Hz
功率: 250W
光源: 添鑫10Wx20颗LED四合一五合一高亮灯珠
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
功能效果: 调光, 频闪、流水、渐变、颜色。
调光: 0~100%线性调光,
频闪: 0~25/s
最佳投射距离: 5~50米
控制模式: DMX512, 主从, 自走, 声控
通道: 9CH
防水等级: IP65
纸箱尺寸: 65x65x22cm
净重: 7.25kg
毛重: 8kg

SPECIFICATIONS

Voltage: AC110 ~ 240V 50Hz/60Hz
Light Source: 36x3W (CREE Amber LED)
Control mode: DMX, master/slave, sound, auto
Display: Color LCD display
Channel: 5/36 channels optional;
Beam angle: 5° ;
Total power: 180W
Packing size (mm): 600x600x380 (2pcs/CTN)
Net weight: 7KG/PCS

SPECIFICATIONS

Input voltage: AC110~240V 50~60Hz
Input Power: 80 / 220W
Source: 72pcs 3W High Brightness LED
Beam angle: 25° / 45° / 60° optional
Color temperature: 3200K to 6500K
Features: current, voltage, temperature
excess protection,
Low power consumption, high
brightness LED
Control signal: DMX512
Control: DMX512 master-slave,
auto,sound
Channel: 8 channels

SPECIFICATIONS

Voltage: AC90~240V 50/60Hz
LED Quantities: 72pcs X 3W RGBW LED
(R: 12pcs / G: 24pcs / B: 24pcs / W: 12pcs)
108pcs X 3W RGBW LED (R: 24pcs
/ G: 28pcs / B: 28pcs / W: 28pcs) 4in1
Control mode: DMX 512, Master/Slave,
Sound Activated and Work Auto
Control Channel: 4/8/12 DMX Channels
Power consumption: 250W/350W
Dimension: 600x240x340mm
N.W: 12kg
G.W: 14K

SPECIFICATIONS

Input Voltage: AC100~240V, 50/60Hz
Power Consumption: 480W
LED Quantities: 48PCS 10W 4IN1 LED
Control Signal: DMX 512,
Master-slave, Auto
Control Channels: 4/8CH
IP Rating: Ip65
Net Weight: 12.5 KG
Gross Weight: 14 KG
Packing Size: 680(D)*370(W)*280(H)mm

SPECIFICATIONS

Input Voltage: AC100~240V, 50/60Hz
Power Consumption: 360W

LED Quantity: 36PCS 10W 4IN1 LED

Control Signal: DMX512, Master-slave,

sound,auto

Control Channel: 4/8DMX512 channels

Waterproof Grade: Ip65

NW: 15 KG

GW: 32 KG

Product Dimensions: 560*240*410mm

Packing Size: 680(D)*420(W)*600(H)mm

(1-in-1 Flightcase)

MF-1810FT

18颗六合一防水投光灯
18Pcs 6 in 1 Square Waterproof LED Flood Light



技术参数

电压: AC110~240V 50/60Hz
功率: 280W
LED光源: 添鑫18 PCS 15W 6 IN 1 RGBWA + UV (18pcs * 15W 4in1 RGBW LED) (可选五合一红绿蓝白琥珀)
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
功能效果: 调光、频闪、流水、渐变、颜色。
调光: 0~100%线性调光。
频闪: 0~25/s
最佳投射距离: 5~50米
控制模式: DMX512, 主从, 自走, 声控
通道: 9CH
防水等级: IP65
净重: 7.25kg
毛重: 8kg
包装尺寸: 450 x 300 x 350mm

MF-X7203

72颗洗墙灯
72Pcs LED Wall Washers



技术参数

输入电压: AC90~240V
功率: 216W
LED光源: 72pcs 3W RGB LED
光束角度: 15°, 25°, 45°, 60°
通道: 3/4/5 / 8CH
净重: 6.6Kg
毛重: 7.8Kg
包装尺寸: 1280 x 180 x 200mm

MF-X2403

24/36颗洗墙灯 (可选点控)
24/36Pcs LED Wall Washer Light



技术参数

输入电压: AC90~240V, 50/60Hz
功率: 72W
光源: 24PCS 3W 3in1 LED
包装尺寸: 1050 (D) * 130 (W) * 150 (H) mm
外箱尺寸: 1070 (D) * 430 (W) * 330 (H) mm
控制通道: 3CH
IP等级: IP65
净重: 4.6KG
毛重: 5.2KG

MF-X1812

18颗洗墙灯 (可选点控)
18Pcs LED Wall Washer



技术参数

输入电压: AC100~240V, 50/60Hz
功率: 180W
LED光源: 18PCS 10W 4IN1 LED, 每个LED可以独立控制
控制通道: 9/23 / 72CH
IP等级: IP65
净重: 7.5 KG
毛重: 8.1 KG
包装尺寸: 1050 (D) * 220 (W) * 170 (H) mm
尺寸: 1070 (D) * 450 (W) * 190 (H) mm (2-in-1)

MF-X1810

18颗4合1智能洗墙灯
18Pcs 4 in 1 Smart Wall Washer



技术参数

电压: AC90V~240V 50/60 Hz .
功率: 200W
光源: 18颗10W4合1灯珠
光斑角度: 20/ 25度/40度 (可选)
通道: 9/23/72
控制信号: DMX/512 / 主从 / 声控 / 自走
效果: 点控, 流水效果
防护等级: IP65

SPECIFICATIONS

Voltage: AC110~240V 50/60Hz
Power: 280W
LED light source: Tianxin 18 PCS 15W 6 IN 1 RGBWA + UV (18pcs * 15W 4in1 RGBW LED) (Optional 5 in 1 Red Green Blue White Amber)
Lamp life: 50000 hours theoretical life, low power consumption.
Functional effects: dimming, strobe, running water, gradient, color.
Dimming: 0~100% linear dimming.
Strobe: 0 to 25/s
Best throw distance: 5~50 meters
Control mode: DMX512, master slave, self-propelled, voice activated
Channel: 9CH
Waterproof rating: Ip65
Net weight: 7.25kg
Gross weight: 8kg
Packing size: 450 x 300 x 350mm

SPECIFICATIONS

Input voltage:AC90~240V
Power consumption:216W
LED source:72pcs 3W RGB LED
Beam angle:15° , 25° , 45° , 60°
Channel channel:3/4/5/8CH
Net weigth:6.6Kg
Gross weight:7.8Kg
Packing size:1280 x 180 x 200mm

SPECIFICATIONS

Input Voltage: AC90~240V,50/60Hz
Power Consumption: 72W
Packing Size: 1050(D)*130(W)*150(H)mm
Outer Box size: 1070(D)*430(W)*330(H)mm (6-in-1)
24PCS 3W 3in1 LED
Control Channels:3CH
IP Rating: Ip65
Net Weight: 4.6 kg
Gross Weight: 5.2 kg

SPECIFICATIONS


Input Voltage: AC100~240V,50/60Hz
Power Consumption: 180W
LED Quantities:18PCS 10W 4IN1 LED, Each LED can be control independently
Control Channels: 9/23/72CH
IP Rating: Ip65
Net Weight: 7.5 KG
Gross Weight: 8.1 KG
Packing Size: 1050(D)*220(W)*170(H)mm
Size: 1070(D)*450(W)*190(H)mm (2-in-1)

SPECIFICATIONS

Rate Voltage: AC90V~240V 50/60 Hz.
Rate Power: 200W
Light source: 18 PCS 10W 4in1 RGBW LED
Spot angle: 20/25 degrees / 40 degrees (optional)
Channels: 9/23/72
Control signals: DMX/512 / master-slave / sound / auto
Effect: point control, water effects
Protection class: Ip65

MF-X1430

14颗*30W RGB 三合一防水洗墙灯
14pcs* 30W RGB 3in1 Waterproof Wall Washer

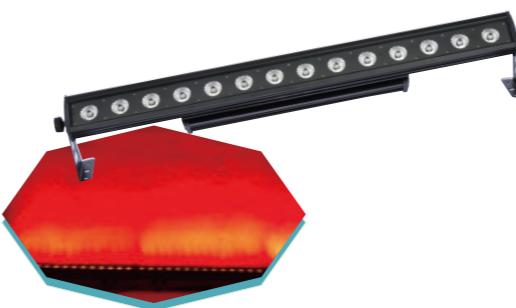

技术参数


输入电压: AC90~260V 50/60Hz
LED数量: 14颗30W三合一灯珠
控制模式: DMX512, 主从机, 声控及自走模式
控制通道: 2/3/5/8/42/44 通道
功能消耗: 450W
产品尺寸: 100x11x17cm
净重: 7.8 kg
毛重: 9 kg

SPECIFICATIONS

Input Voltage: AC90~240V 50/60Hz
LED Qty:14pcs 30W RGB 3-in-1 LED
Control Mode: DMX 512,Master-Slave, Sound and Auto
Control Channel:2/3/5/8/42/44
DMX Channels
Power Consumption: 450W
Dimensions: 100x11x17cm
N.W: 7.8 kg
G.W: 9 kg

MF-X1203/MF-X2403

12/24颗洗墙灯
12/24Pcs Wall Washer

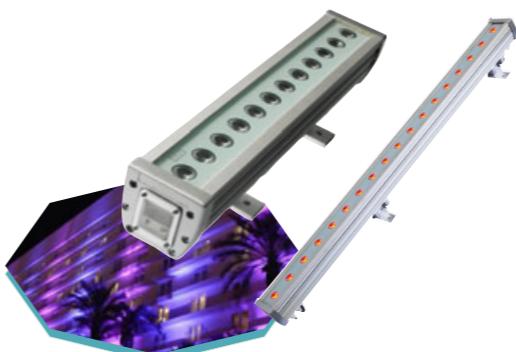

技术参数

输入电压: AC100~240V;50/60Hz
消耗功率: 12/36W
灯珠数量: 12颗1/3W LED灯珠
(红:4颗;绿:4颗;蓝:4颗)
控制信号: DMX512,主从机,自走程序
控制通道: 3/7个国际标准DMX通道
防水等级: IP65
净重: 2.5kg 毛重: 3kg
产品尺寸: 430*80*120 mm
包装尺寸: 490(D)*130(W)*150(H)mm
外箱尺寸: 575(D)*510(W)*330(H)mm (8-in-1)

SPECIFICATIONS

Input Voltage: AC100~240V,50/60Hz
Power Consumption: 12/36W
LED Quantities: 12PCS 1/3W LED (R:4pcs,G:4pcs,B:4pcs)
Control Signal: DMX 512, Master-Slave,Auto
Control Channels:3/7CH
IP Rate: Ip65
Net Weight: 2.5 kg
Gross Weight: 3 kg
Product Size: 430*80*120 mm
Packing Size: 490(L)*130(W)*150(H)mm
Outer Box Size: 575(L)*510(W)*330(H) mm (8-in-1)


MF-X1403
14颗LED点阵灯
14 Pcs LED Matrix Light

技术参数

输入电压: AC 100~240V, 50/60HZ
额定功率: 49W/230V
光源: 14颗3W 暖白CREE LED
灯珠寿命: 50, 000小时
色温: 2800K
净重: 2.8KG
控制模式: 智能ARTNET, DMX信号控制, 主/从机, 自走模式
DMX512控制通道: 5/14/19通道
光束角: 6°
辐射范围: 8°
60MM距配合MADRIX软件可成像, 产生3D立体效果

SPECIFICATIONS

Input voltage: AC 100~240V, 50/60HZ
Rated power: 49W/230V
Light source: 14pcs 3W warm white CREE LED
Lamp beads life: 50,000 hours
Color temperature: 2800K
Net weight: 2.8KG
Control mode: intelligent ARTNET, DMX signal control, Master-slave, auto
DMX512 control channel: 5/14/19 channel
Beam angle: 6°
Radiation range: 8°
60MM can be imaged with MADRIX software, Produce 3D stereoscopic effects

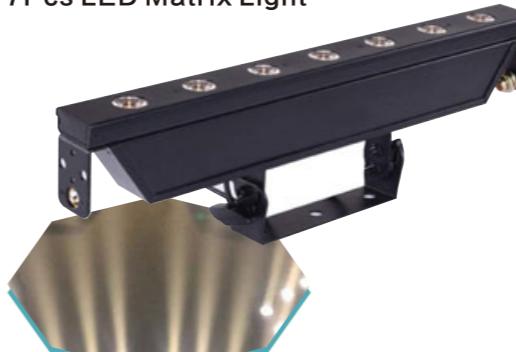MF-X0703
7颗LED点阵灯
7Pcs LED Matrix Light

技术参数

输入电压: AC 100~240V, 50/60HZ
额定功率: 24.5W/230V
光源: 7颗3W 暖白CREE LED
灯珠寿命: 50,000小时
色温: 2800K
控制模式: 智能ARTNET, DMX信号控制, 主/从机, 自走模式
DMX512控制通道: 5/7/12通道
光束角: 6°
辐射范围: 8°
净重: 2.0KG

SPECIFICATIONS

Input voltage: AC 100~240V, 50/60HZ
Rated power: 24.5W/230V
Light source: 7pcs 3W warm white CREE LED
Lamp beads life: 50,000 hours
Color temperature: 2800K
Control mode: intelligent ARTNET, DMX signal control, Master/slave, auto
DMX512 control channel: 5/7/12 channels
Beam angle: 6°
Radiation range: 8°
Net weight: 2.0KG

追光灯系列 Follow Light Series

MF-Z2500
2500W追光灯
2500W Follow Light



MF-ZG17R
17R追光灯
17R Follow Light



MF-ZG7R
230追光灯
72/108Pcs LED Follow Light



MF-Z200/MF-Z300/MF-400
LED 200-400W 追光灯
200-400W LED Follow Light



技术参数

电压: AC220~AC240V/ 50Hz
额定功率: 3000W
灯泡: SXB2500W
功能: 机械操作聚光灯,
4色板切割图, 手动切光,
聚焦和光圈变化。
灯尺寸 (mm): 1850 × 460 × 550
电源尺寸 (mm): 480 × 490 × 390
重量: 35kg
电源重量: 25kg

SPECIFICATIONS

Voltage: AC220~AC240V/50Hz
Rated Power: 3000W
Lamp: SXB2500W
Function: Mechanical operation spotlight lamp,
4colors plates cutchart, Manual cuts the light, the
focusing and the aperture change.
Light Size (mm): 1850 × 460 × 550
Power size (mm): 480 × 490 × 390
Light Weight: 35kg
Power weight: 25kg

技术参数

支持电压: AC100~240V 50Hz/60Hz
耗电功率: 400W
灯泡规格: 350W飞利浦灯泡
光速距离: 80
光速角度: 23度
包装尺寸: 71.5 × 34.5 × 35.5cm
净重: 13.75KG
毛重: 15.25KG

SPECIFICATIONS

Supply voltage: AC100~240V 50Hz / 60Hz
Power consumption: 400W
Bulb Specifications: 350W Philips Bulb
Lightspeed Distance: 80
Speed of light angle: 23 degrees
Size: 71.5 × 34.5 × 35.5cm
N.W: 13.75KG
G.W: 15.25KG

技术参数

电源电压: AC220V~240V 50Hz / 60Hz
功率: 300W
灯泡规格: 欧司朗230W气体放电灯
颜色: 色轮4色+白色, 图案可以定制
控制信号: 自制信号
孔径的影响: 孔径尺寸可调 频闪: 1~7次/秒频闪
光线距离: 10~25m
光角度: 23°
安全措施: 符合各种安全标准,
IP: 20
重量: 15Kg

SPECIFICATIONS

Power supply voltage: AC220V~240V 50Hz/60Hz
Power: 300W
Bulb specification: OSRAM 230W gas discharge lamp
Color: Color wheel 4 colors + white, pattern can be customized
Control signal: homemade signal
Effect of aperture: Aperture size is adjustable Strobe:
1~7 times / second strobe
Light distance: 10~25m
Light angle: 23°
Safety measures: comply with various safety standards
IP:20
Weight: 15Kg

技术参数

电压: AC220V~240V 50Hz / 60Hz
功耗: 250~400W
灯泡规格: 200W~400W LED灯珠
颜色: 色轮6色+白色, 图案可以定制
控制信号: 自动旋钮控制
控制模式: 独立模式
光学系统: 美国亮流珠, 200W LED灯珠
冷却系统: 高强度空气冷却
光圈效果: 光圈尺寸可调
色温校正: 正常5600K, 可调
6000K, 下降3200K
光束距离: 35M
光速: 23°

SPECIFICATIONS

Voltage: AC220V~240V 50Hz / 60Hz
Power consumption: 150W
Bulb size: 150W LED lamp beads
Color: color wheel 6 colors + white, pattern can be customized
Control signal: automatic knob control
Control mode: independent mode
Optical System: American bright pearl, 200W LED lamp beads
Cooling System: High-intensity air cooling
Aperture effect: adjustable aperture size
Color temperature correction: normal 5600K, adjustable
6000K, down 3200K
Beam distance: 35M
Light speed: 23°

效果灯系列 Effect Light Series

MF-0915Y
明烽9眼LED摇头矩阵灯
3*3 LED Moving Head Light Matrix



MF-0910Y
变形矩阵
Deformation LED Matrix Light



MF-2510
25头LED矩阵灯 (白/彩)
25 Pcs LED Matrix Light
(White / Colorwl)



MF-0715YZ
明烽 7颗无极矩阵灯
7 Pcs Infinity LED Matrix Lights



技术参数

电压: AC100V~220V/50/60Hz
光源: 9颗12W CREE四合一功率灯珠
功率: 110W
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
像素: 9像素 (每个LED作为像素), 每个独立可控。
调光: 0~100%线性调光, 平滑无闪烁。
运行模式: DMX512, 声控, 自走, 主从
控制通道: 1DMX 16/48通道可转换
水平扫描角度: 540°
垂直扫描角度: 270°
运转速度: 8/16Bit
效果: 光束矩阵摇头, 单控
光束角度: 7°
频闪: 1~25次/秒电子频闪与随机频闪
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高,
多功能, 应用范围广,
外壳: 采用ABS防火塑料
防护等级: IP20
可选防雨罩防护等级将达到IP44
包装尺寸: 54*41*46cm
外观尺寸: 300*200*340mm
净重: 7KG 毛重: 8 KG

SPECIFICATIONS

Voltage: AC100V~220V/50/60Hz
Light source: 9pcs 12W CREE quadruple power LED
Power: 110W
Lamp life: 50000 hours theoretical life, low power consumption.
Pixels: 9 pixels (each LED as a pixel), each individually controllable.
Dimming: 0~100% linear dimming, smooth and no flicker.
Operating mode: DMX512, voice activated, self-propelled, master-slave
Control channel: 1DMX 16/48 channels can be converted
Horizontal scanning angle: 540°
Vertical scanning angle: 270°
Operating speed: 8/16Bit
Effect: beam matrix shaking head, single control
Beam angle: 7°
Strobe: 1~25 times / second electronic strobe and random strobe
Performance: The original Cree lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications.
Shell: ABS fireproof plastic
Protection class: Ip20
Optional rain cover protection level will reach Ip44
Packing size: 54*41*46cm
Appearance size: 300*200*340mm
N.W: 7KG G.W: 8 KG

SPECIFICATIONS

Voltage: AC90~220V, 50/60Hz
Power: 100W
光源: 9颗X10W 4合一科锐灯珠
控制模式: 自走, DMX512,
主从, 声控
旋转角度: X轴540° , Y轴180°
调光: 0~100%线性调光
频闪: 1~10次/秒
光源寿命: 50000小时

SPECIFICATIONS

Rated voltage 90~230V
Rated power: 180W
Source: 530W full-color LED (RGB 3in1)
also do warm white
Control mode: DMX mode, master-slave mode, sound
Number of Channels: 8/20 channel optional
Protection: Ip20
Packing Size: 550x550x250mm
Weight: 22kg

SPECIFICATIONS

Voltage: AC100~240V, 50/60Hz
Power: 120W
光源: CREE 7 X15W RGBW四合一 LED光源
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
光束角: 4°
DMX通道: 12/15 /39CH
控制模式: DMX512, 自动, 主从, 音乐水平/垂直水平和垂直旋转水平/垂直分辨率;
16位显示: 液晶显示器
DMX输入/输出接口: 3针XLR插座
16-bit display: LCD display
DMX input/output interface: 3-pin XLR socket
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高,
多功能, 应用范围广,
防护等级: IP20
外形尺寸: 58*17*25cm
包装尺寸: 64*32*24.5cm
净重: 9KG
毛重: 11KG
Gross weight: 11KG

效果灯系列 Effect Light Series

MF-0512YZ

明烽 5颗无极摇头灯

5 Pcs Free Rotation Moving



MF-1630W

明烽幻影摇头灯

Phantom Moving Head Light



MF-0912HY

明烽小幻影摇头灯

Mini Phantom Moving Head Light



**MF-0810A (全彩)
MF-0810B (白光)**

明烽 蜘蛛灯

LED Spider Light



技术参数

输入电压: AC90~240V, 50/60Hz
功率: 90W
光源: 5pcs * 12W RGBW 4in1 CREE LED
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
色温: 2300 K
通道: 6/18/29/31CH
控制模式: DMX512, 自动, 主从.
16位显示: 液晶显示器
DMX输入/输出接口: 3针XLR插座
光束角度: 8°
XY轴水平/垂直: 360° 连续旋转
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高, 多功能, 应用范围广,
防护等级: IP20
包装尺寸: 68 * 29 * 29CM
毛重: 11KG

SPECIFICATIONS

Input voltage: AC90~240V, 50/60Hz
Power: 90W
Light source: 5pcs * 12W RGBW 4in1 CREE LED
Lamp life: 50000 hours theoretical life, low power consumption.
Color temperature: 2300 K
Channel: 6/18/29/31CH
Control mode: DMX512, automatic, master slave
16-bit display: LCD display
DMX input/output interface: 3-pin XLR socket
Beam angle: 8°
XY axis horizontal/vertical: 360° continuous rotation
Performance: The original Cree lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications.
Protection class: IP20
Packing size: 68 * 29 * 29CM
Gross weight: 11KG

**MF-0910A (全彩)
MF-0910B (白色)**
明烽 九头鸟蜘蛛灯
Nine Head LED Spider Lights



技术参数

输入电压: AC90~240V, 50/60Hz
消耗功率: 140W
灯珠数量: 9x12W四合一CREE LED或9x12W白色LED灯珠
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
色温: 2300 K
像素: 9像素 (每个LED作为像素), 每个独立可控。
控制信号: DMX512, 主从机, 声控或者自走程序
控制通道: 12/46CH
角度: 光束角度: 2°
频闪: 18次/秒的高速频闪和脉冲频闪效果
调光: 0~100%顺滑电子调光
效果: 水平无极旋转, 垂直180° 旋转
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高, 多功能, 应用范围广,
防护等级: IP20
净重: 9kg
毛重: 11.8kg
产品尺寸: 490*458*208mm
包装尺寸: 560(D)*490(W)*265(H)mm

SPECIFICATIONS

Input voltage: AC90~240V, 50/60Hz
Power consumption: 140W
Lamp Beads: 9x12W 4IN1 CREE LED or 9x12W White LED
Lamp life: 50000 hours theoretical life, low power consumption.
Color temperature: 2300 K
Pixels: 9 pixels (each LED as a pixel), each individually controllable.
Control signal: DMX512, master-slave, sound,auto
Control channel: 12/46CH
Angle: Beam angle: 2°
Strobe: 18 times per second high-speed strobe and pulse strobe effect
Dimming: 0~100% smooth electronic dimming
Effect: horizontal stepless rotation, vertical 180° rotation
Performance: The original Cree lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications
Protection class: IP20 Net weight: 9kg
Gross weight: 11.8kg Product size: 490*458*208mm
Packing size: 560(D)*490(W)*265(H)mm

效果灯系列 Effect Light Series

**MF-0811A (全彩)
MF-0811B (白光)**

明烽 双排摇头蜘蛛灯 (横排)

**MF-0811A (全彩)
MF-0811B (白光)**
明烽 双排摇头蜘蛛灯 (横排)
Mingyu Double Row Moving Head Spider Light (horizontal)



技术参数

电压: AC110V~260V 50/60Hz
功率: 180W
灯珠: CREE 8颗 x 12W LED 红蓝绿白 4合1
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
颜色: RGBW
色温: 2300 K
控制模式: 11CH/37CH
光束角度: 2°
X轴转: 540°
Y轴: 两个垂直120° Y1轴120° , Y2轴120°
频闪: 0~20次/秒, 矢量变化效果
线性可调快门/闪光灯: 1~100%
线性可调亮度: 0~100%
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高, 多功能, 应用范围广,
防护等级: IP20
重量: 5.5kg
纸箱包装尺寸: 445 x 310 x 320mm

SPECIFICATIONS

Voltage: AC110V~260V 50/60Hz
Power: 180W
Lamp beads: CREE 8 x 12W LED Red Blue Green White 4 in 1
Lamp life: 50000 hours theoretical life, low power consumption.
Color: RGBW
Color temperature: 2300 K
Control mode: 11CH/37CH
Beam angle: 2°
X axis rotation: 540°
Y axis: two vertical 120° . Y1 axis 120° , Y2 axis 120°
Strobe: 0~20 times / second, vector change effect
Linear Adjustable Shutter/Flash: 1 ~ 100%
Linear adjustable brightness: 0 ~ 100%
Performance: The original Cree lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications,
IP: 20
Weight: 5.5kg
Carton packing size: 445 x 310 x 320mm

**MF-0812A (全彩)
MF-0812B (白光)**

明烽 双排摇头蜘蛛灯 (竖排)

**MF-0812A (全彩)
MF-0812B (白光)**
明烽 双排摇头蜘蛛灯 (竖排)
Double Row Head Spider Light (vertical)



技术参数

电压: AC110V~260V 50/60Hz
功率: 180W
灯珠: CREE 8颗 x 12W LED 红蓝绿白 4合1
灯珠寿命: 50000个小时理论寿命, 低功率消耗。
颜色: RGBW 无限混色
色温: 2300 K
控制模式: 11CH/37CH
光束角度: 2°
X轴转: 540° Y轴: 两个无极360° 旋转
频闪: 0~20次/秒, 矢量变化效果
线性可调快门/闪光灯: 1~100%
线性可调亮度: 0~100%
性能: 采用原装科锐灯珠, 稳定耐用, 寿命长, 亮度高, 多功能, 应用范围广,
防护等级: IP20
净重: 7kg 毛重: 10kg
纸箱包装尺寸: 465 x 210 x 450mm

SPECIFICATIONS

Voltage: AC110V~260V 50/60Hz
Power: 180W
Lamp beads: CREE 8 x 12W LED Red Blue Green White 4 in 1
Lamp life: 50000 hours theoretical life, low power consumption.
Color: RGBW infinite color mixing
Color temperature: 2300 K
Control mode: 11CH/37CH
Beam angle: 2°
X axis rotation: 540°
Y axis: two infinite 360° rotation
Strobe: 0~20 times / second, vector change effect
Linear Adjustable Shutter/Flash: 1 ~ 100%
Linear adjustable brightness: 0 ~ 100%
Performance: The original Cree lamp beads, stable and durable, long life, high brightness, multi-function, a wide range of applications,
IP: 20
Net weight: 7kg
Gross weight: 10kg
Carton packing size: 465 x 210 x 450mm

**MF-0903A (全彩)
MF-0903B (白光)**

明烽 迷你九头鸟蜘蛛灯

**MF-0903A (全彩)
MF-0903B (白光)**
明烽 迷你九头鸟蜘蛛灯
Nine Head Spider Light



技术参数

电压: AC110V~240V 50/60Hz
光源: 9 x 3W亮 (CREE LED) /R3, G3, B3
控制模式: DMX512, 主/从、声控, 自走
通道: 9CH/13CH/17CH通道可选
可切换效果: 白光、彩光光束, 单点控制
亮度: 0%~100%线性调光 (电子调光), 1~15/秒, 可调 (电子频闪)
运行模式: 单机模式, 控制器模式, 主/从同步模式
功能效果: 单点、单色控制、多种内置程序, 超炫声控效果
消耗功率: 50W
包装尺寸(mm): 740x405x225(2pcs/CTN)
净重: 4.5KG/PCS

SPECIFICATIONS

Voltage: AC110~240V 50/60Hz
Lamp: 3W*9PCS CREE LED (R3/G3/B3)
Control mode: DMX512, Master/slave, Auto-run, Sound active.
Channel: 9/13/17CH optional.
Effect: White, colorful beam, Each LED can control separately
Dimmer: electric 0%~100% linear dimmer.
Strobe: 1~15times/S electric strobe.
Function: Each color or led can control separately and built in program.
Rated power: 50W
Packing size(mm): 740x405x225(2pcs/CTN)
N/W: 4.5KG/PC

MF-0902A (全彩)**MF-0902R (单红)****MF-0902G (单绿)****MF-0902B (单蓝)**

明烽 九头鸟激光蜘蛛灯

Nine Head Spider Laser Light

**MF-0901A (全彩)****MF-0901R (单红)****MF-0901G (单绿)****MF-0901B (单蓝)**


明烽 双排激光蜘蛛灯

Double-row Spider Laser Light

**MF-0612A/MF-0612B**

LED双截6头摇头灯

Six Head Moving Head Light

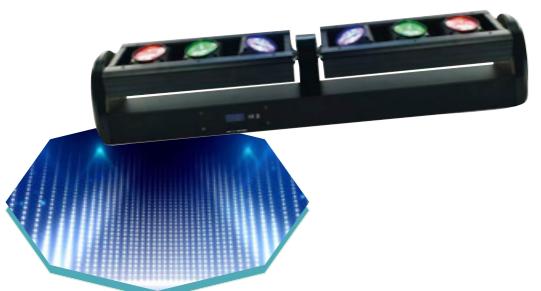**MF-0610A (白光)****MF-0610B (全彩)**

LED6头摇头灯

6 Head Moving Head Light



技术参数

工作电压/频率: 100~240V 50/60Hz
光源: 3 * R / 300mw + 3 * G / 150mw + 3 * B / 300mw 或 9 * 50mw G
激光颜色: 红, 绿, 蓝 (可定制单红, 绿, 蓝)
功率: 150W
通道: 16CH/46CH
控制方式: DMX512, 声控, 自动, 主从开启角度: X轴: 旋转无极, Y - 轴: 185度
储存温度: 40°C~10°C 到
防护等级: IP20
产品重量: 9KG
毛重: 12.5KG
尺寸: 458 * 429 * 208mm
包装尺寸: 55* 50 * 28CM


SPECIFICATIONS

Operating voltage/frequency: 100~240V 50/60Hz
Light source: 3 * R / 300mw + 3 * G / 150mw + 3 * B / 300mw or 9 * 50mw G
Laser color: red, green, blue (can be customized single red, green, blue)
Power: 150W
Channel: 16CH/46CH
Control method: DMX512, voice activated, automatic, Master-slave open angle: X-axis: Rotating pole, Y-axis: 185 degrees
Storage temperature: 40° C-10° C to
Protection class: Ip20
Product weight: 9KG
Gross weight: 12.5KG
Size: 458 * 429 * 208mm
Packing size: 55* 50 * 28CM

MF-XF16

16颗旋风

16 Pcs Tornado Light

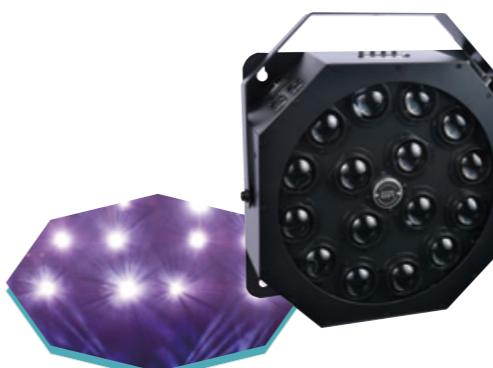**MF-XF06**

6颗旋风

6 Pcs Tornado Light



技术参数

电源: AC110/220V 50/60Hz
光源: 15W LED*16PCS(RGBW)
功率: 100W
自走, 声控, DMX512
净重: 2.5KG
毛重: 2.7KG
内包装尺寸: 27x26x12cm
外包装尺寸: 57x54x28cm 8pcs/Ctn

SPECIFICATIONS

Power: AC110/220V 50/60Hz
Source: 15W LED*16PCS (RGBW)
Power: 100W
auto.sound, DMX512
N.W: 2.5KG
G.W: 2.7KG
Inner packing size: 27x26x12cm
Packing size: 57x54x28cm 8pcs/Ctn

MF-0901A (全彩)**MF-0901R (单红)****MF-0901G (单绿)****MF-0901B (单蓝)**

明烽 双排激光蜘蛛灯

Double-row Spider Laser Light



技术参数

工作电压/频率: 100~240V 50/60Hz
光源: 4 * R / 400mw + 2 * G / 100mw + 2 * B / 200mw OR 4 * G / 200MW+2R/200MW+2 * B /200MW
激光颜色: 红, 绿, 蓝 (可定制单红, 绿, 蓝)
运行模式: DMX控台控制, 自走, 声控, 主/从机同步模式
DMX通道数: 15/46通道
角度: X: 540度 Y1: 120度 Y2: 120度
X/Y速度: 高 中 低三级速度选择
储存温度: 40°C~10°C
防护等级: IP20
重量: 8.5kg
毛重: 11KGS
尺寸: 445 x 310 x 320mm
包装尺寸: 51 * 38 * 38CM

SPECIFICATIONS

Operating voltage/frequency: 100~240V 50/60Hz
Light source: 4 * R / 400mw + 2 * G / 100mw + 2 * B / 200mw OR 4 * G / 200MW+2R/200MW+2 * B /200MW
Laser color: red, green, blue (can be customized single red, green, blue)
Operating mode: DMX console control, auto.sound, master/slave synchronous mode
DMX Channels: 15/46 channels
Angle: X: 540 degrees Y1: 120 degrees Y2: 120 degrees
X/Y Speed: High Medium Low 3 Speed Select
Storage temperature: 40° C-10° C
Protection class: Ip20
Weight: 8.5kg
Gross weight: 11KGS
Size: 445 x 310 x 320mm
Packing size: 51 * 38 * 38CM

技术参数

电源: AC100~240V 50 / 60Hz
功率: 100W
LED: 6PCS x 12W RGBW 4in1 Cree LED
控制模式: DMX, 主/从和声音活动。
频道: 18 / 37CH
伟大的内置照明显示在主/从
由音控触发的模式。
调光: 平滑0~100%调光
频闪: 可变频闪速度。
倾斜: Y-1 270 + 16位; Y-2 270 + 16位
包装尺寸: 48 * 33 * 24cm
重量: 6kg

SPECIFICATIONS

Power supply: AC100~240V 50/60Hz
Power consumption: 100W
LED: 6PCS x 12W RGBW 4in1 Cree LED
Control modes: DMX, Master/Slave and Sound Active.
Channel: 18/37CH
Great built-in lighting shows under Master/Slave mode triggered by music.
Dimming: Smooth 0~100% dimming
Strobe: variable strobe speeds.
Pan: 540+16bit
Tilt: Y-1 270+16 bit; Y-2 270+16bit
Packing Size: 48*33*24cm
Weight: 6kg

技术参数

电源: AC100 / 240V 50 / 60Hz
功率: 80W
光源: 6PCS x 10W白色或
RGBW 4in1 Cree LED
显示: 液晶显示; IP级别: IP20
控制模式: DMX, 主从, 声控
调光: 0~100%平滑调光,
可变频闪速度
倾斜: 270°
尺寸: 773 * 185 * 114mm
重量: 4.6kg

SPECIFICATIONS

Power supply: AC100~240V 50/60Hz
Power consumption: 80W
Light source: 6PCS x 10W White or
RGBW 4in1 Cree LED
Display: LCD Display; IP Rate: Ip20
Control modes: DMX, Master Slave, Sound
Channel: Dimming: 0~100% Smooth dimming, variable strobe speeds
Tilt: 270°
Size: 773 * 185 * 114 mm
Weight: 4.6kg

MF-LG50B

30W/50W LED高清旋转广告投影灯

30W/50W Rotation LED Logo Projection Light



技术参数

电压: AC110~220V 50/60Hz
功率: 30W/50W
光源: LED
旋转: 图案原地360旋转
尺寸: 165x120x130mm
重量: 1.3kg
环境距离: 2~16米内

SPECIFICATIONS

Voltage: AC110~220V 50/60Hz
Power: 30W/50W
Source: LED
Rotation: Pattern in situ Rotate 360 degrees
Size: 165x120x130mm
Weight: 1.3kg
Environmental distance: 2~16M

MF-0610A (白光)**MF-0610B (全彩)**

LED6头摇头灯

6 Head Moving Head Light



技术参数

电源: AC100 / 240V 50 / 60Hz
功率: 80W
光源: 6PCS x 10W白色或
RGBW 4in1 Cree LED
显示: 液晶显示; IP级别: IP20
控制模式: DMX, 主从, 声控
调光: 0~100%平滑调光,
可变频闪速度
倾斜: 270°
尺寸: 773 * 185 * 114mm
重量: 4.6kg

SPECIFICATIONS

Power supply: AC100~240V 50/60Hz
Power consumption: 80W
Light source: 6PCS x 10W White or
RGBW 4in1 Cree LED
Display: LCD Display; IP Rate: Ip20
Control modes: DMX, Master Slave, Sound
Channel: Dimming: 0~100% Smooth dimming, variable strobe speeds
Tilt: 270°
Size: 773 * 185 * 114 mm
Weight: 4.6kg

MF-LG50W

50W LED高清旋转广告投影灯

50W Rotation LED Logo Projection Light



技术参数

电压: AC110~220V 50/60Hz
功率: 50W
光源: LED
旋转: 图案原地360旋转
尺寸: 165x120x130mm
重量: 1.3kg
环境距离: 2~16米内

SPECIFICATIONS

Voltage: AC110~220V 50/60Hz
Power: 50W
Source: LED
Rotation: Pattern in situ Rotate 360 degrees
Size: 165x120x130mm
Weight: 1.3kg
Environmental distance: 2~16M

效果灯系列 Effect Light Series

激光灯系列 Laser Light Series

MF-LG50A

50W LED高清遥控旋转广告投影灯
50W Rotation Remote LED Logo Projection Light



MF-LG30A

30W LED高清遥控旋转广告投影灯
30W Rotation Remote LED Logo Projection Light



MF-LG12A

12W LED高清静止防水广告投影灯
12W Static Waterproof LED Logo Projection Light



MF-LG12B

12W LED高清旋转广告投影灯
12W Rotation LED Logo Projection Light



MF-LG12C

12W LED高清旋转广告投影灯
12W Rotation LED Logo Projection Light



技术参数

电压: AC110~220V 50/60Hz
功率: 50W
光源: LED
旋转: 图案原地360旋转
尺寸: 165x120x130mm
重量: 1.3kg
环境距离: 2~16米内

SPECIFICATIONS

Voltage: AC110~220V 50/60Hz
Power: 50W
Source: LED
Rotation: Pattern in situ Rotate 360 degrees
Size: 165x120x130mm
Weight: 1.3kg
Environmental distance: 2~16M

技术参数

电压: AC110~220V 50/60Hz
功率: 30W
光源: LED
旋转: 图案原地360旋转
尺寸: 165x120x130mm
重量: 1.45kg
环境距离: 2~16米内

SPECIFICATIONS

Voltage: AC110~220V 50/60Hz
Power: 30W
Source: LED
Rotation: Pattern in situ Rotate 360 degrees
Size: 165x120x130mm
Weight: 1.45kg
Environmental distance: 2~16m

技术参数

电压: AC100~240V 50/60Hz
功率: 12W
光源: 12W科锐LED, 功能强大, 寿命长, 亮度高
防护等级: IP65
尺寸: 80x170x190mm
重量: 1.0kg
用途: 室内, 广告投影, 引路指示, 婚庆舞台, 房号投影等。

SPECIFICATIONS

Voltage: AC100~240V 50/60Hz
Power: 12W
Source: 12W CREE LED, Powerful, Long life, High brightness
IP Rate: Ip65
Size: 80x170x190mm
Weight: 1.0kg
Application: Indoor, advertising projection, guide, wedding stage, Room NO, projection,etc.

技术参数

电压: AC100~240V 50/60Hz
功率: 12W
光源: 12W科锐LED, 功能强大, 寿命长, 亮度高
防护等级: IP65
尺寸: 80x170x190mm
重量: 1.0kg
用途: 室内, 广告投影, 引路指示, 婚庆舞台, 房号投影等。

SPECIFICATIONS

Voltage: AC100~240V 50/60Hz
Power: 12W
Source: 12W CREE LED, Powerful, Long life, High brightness
IP Rate: Ip65
Size: 80x170x190mm
Weight: 1.0kg
Application: Indoor, advertising projection, guide, wedding stage, Room NO, projection,etc.

技术参数

电压: AC100~240V 50/60Hz
功率: 12W
光源: 12W科锐LED, 功能强大, 寿命长, 亮度高
防护等级: IP65
尺寸: 80x170x190mm
重量: 1.0kg
用途: 室内, 广告投影, 引路指示, 婚庆舞台, 房号投影等。

SPECIFICATIONS

Voltage: AC100~240V 50/60Hz
Power: 12W
Source: 12W CREE LED, Powerful, Long life, High brightness
IP Rate: Ip65
Size: 80x170x190mm
Weight: 1.0kg
Application: Indoor, advertising projection, guide, wedding stage, Room NO, projection,etc.

MF-JG05Y

全彩摇头激光
Full Color Moving Head Laser



MF-JG05W

全彩动画激光
Full Color Animation Laser



MF-JG08A

八眼激光灯
Eight Eyes Laser Light



MF-K07A

双子星+激光/光束/图案
6in1Wash+Laser/ Beam/Pattern



技术参数

电压: AC100~240V, 50/60Hz;
额定功率: <400W
激光功率: 红色:1W, 635nm, 绿色:1W, 520nm, 蓝色:2W, 445nm
图案: DMX内置144个图案
X轴: 540度 Y轴: 270度
控制方式: 声控/自走/从机/DMX512(19CH)
光束直径及发散角: 5mm: <2mrad
包装尺寸: 34.5X23X48CM, 净重: 8.5KG

SPECIFICATIONS

Voltage: AC100~240V, 50/60Hz;
Rated power: <400W
Laser power: Red: 1W, 635nm, Green: 1W, 520nm, Blue: 2W, 445nm
Pattern: DMX has 144 patterns
X axis: 540 degrees Y axis: 270 degrees
Control method: voice control / self-propelled / master-slave / DMX512 (19CH)
Beam diameter and divergence: 5mm: <2mrad
Package size: 34.5X23X48CM, Net weight: 8.5KG

技术参数

电压: AC100~240V 50/60Hz
额定功率: <900W
激光功率: 红色:2W, 638nm, 绿色:1W, 532nm, 蓝色:2W, 445nm;
控制接口: 国际ILDA DB25接口, 国际通用DMX512接口, 可连接德国火凤凰, 美国穿山甲等软件
控制方式: 声控(4种模式带黑场)/自走/主从机/DMX512(25CH)/SD卡控制/兼容 ILDA 标准电脑激光软件
激光调制: TTL调制 (模拟调制可选)
光束直径及发散角: 5mm: <2mrad
包装尺寸: 56X44X42.5CM, 净重: 17KG

SPECIFICATIONS

Voltage: AC100~240V 50/60Hz
Rated power: <900W
Laser power: Red: 2W, 638nm, Green: 1W, 532nm, Blue: 2W, 445nm;
Control interface: International ILDA DB25 interface, international common DMX512 interface, Can connect with Germany Fire Phoenix, US Pangolin and other software
Control mode: voice control (4 modes with black field)/ self-propelled/master/slave/DMX512(25CH)/ SD Card Control/Compatible ILDA Standard Computer Laser Software
Laser modulation: TTL modulation (analog modulation optional)
Beam diameter and divergence: 5mm: <2mrad
Packing size: 56X44X42.5CM, Net weight: 17KG

技术参数

输入电压: AC100~240V, 50/60Hz
功率: 80W
DMX通道模式: 6CH / 14CH
操作模式: 主从, 声控, 自走, DMX
控制灯: 8个固态激光管
光束颜色: 红色, 绿色和蓝色可选
旋转角度: 270°

SPECIFICATIONS

Input voltage: AC100~240V, 50/60Hz
Power: 80W
DMX channel mode: 6CH / 14CH
Operating modes: master-slave, sound, auto, DMX
Control light: 8 solid-state laser tubes
Beam color: red, green and blue optional
Rotation angle: 270°

技术参数

电压: AC110~220V, 50/60Hz
功率: 130W
光源: 10W进口LED * 6pcs; the middle 15W import lamp beads * 1pc, RGBW or the middle one is laser 150MW;
通道: 14CH / 20CH optional.
控制模式: 声控, 主从, 自动, DMX512
效果: 中间有一个灯具有光束效应
具有15度投影和地板框图。
或者中间是激光束。其他6个灯
具有25度染色效果;

SPECIFICATIONS

Voltage: AC110~220V, 50/60Hz
Power: 130W
Light source: 10W import LED * 6pcs; the middle 15W import lamp beads * 1pc, RGBW or the middle one is laser 150MW;
Channel: 14CH / 20CH optional.
Control mode: voice control, master and slave, auto run, DMX512
Effect: One lamp in the middle have beam effect with 15 degree projection and floor block diagram. Or the middle one is an laser beam. Other 6 pcs have dyeing effect with 25 degrees;

控台系列 Console Series

MF-MA2
控制台
Console



技术参数

6个DMX输出,1个DMX输入,最高扩展可支持65536个通道参数
内置2个15.4英寸触摸屏+1个9英寸触摸屏
可外接DVI显示器或触摸显示器1个
15个高精度电动推杆; A/B场电动推杆; 1个总控电动推杆
6个耐磨编码器(带Push)
1个高灵敏轨迹球;2个千兆以太网口
2个USB2.0口;内置键盘抽屉(2个)
MIDI输入输出接口;LTC/SMPTE时间码
2个LED频闪插槽;固态硬盘1个, 32G Geforce显卡2块
电压: AC90~240V, 50/60Hz
内置不间断UPS电源

SPECIFICATIONS

6 x DMX out+1x DMX in , Up to 65536 parameters
2 x internal TFT Wide mode Touch screen(15.4"WXGA)+1 x internal command screen(9"SVGA)
External DVI Support or touch screen monitor
15 motorized executor faders.A/B motorized Faders,1x Grand Master fader
6 x encoders(push)
1 x trackball;2 x Ethercon connectors
2 x USB2.0 connectors;Inside keyboard drawer(2pcs)
MIDI in/out LTC/SMPTE support
2 LED desk lamps,1xSSD hard disk, 32G 2 x Geforce graphic cards
Voltage:AC90~240V,50/60Hz
UPS Inside

MF-4095
控制台
Console



技术参数

内置4个DMX输出口, 2048个通道
支持网络输出, 通过网络可扩展12个输出
支持协议, 可扩展到64个Universe DMX输出
10个机械翻页重放按键, 20个自定义宏功能推杆
内置一个12.1高亮电容触摸屏, 可控制屏幕亮度
可扩展一个重放舞台, 20重放推杆, 30个自定义宏功能, USB供电
支持耳机输出(headphone)
1个千兆网络接口, 支持协议
与其他TITAN系统控台演出文件兼容
产品尺寸: 425x466x199mm(长x宽x高)
重量: 8kg

SPECIFICATIONS

4 physical DMX XLR-output connectors, 2048 DMX channels
Support -Net, can be extended to 12 DMX universes output
10 Support Titan-Net, can be extended to 64 DMX universes output
20 programmable macro buttons
A 12.1 inch touch screen can control the brightness of display
Can be extended 1 pcs Titan Fader wing
Support headphone output
A thousand megabytes of network port, support Art-net, Titan-net, Streaming
Compatible with other TITAN system console performance files
Size: 425x466x194mm
Weight: 8kg

MF-4096
触屏老虎控台
Touch Screen Tiger Console



技术参数

强大的现场光影控制
新型直观的titan操作系统
反应灵敏的宽屏界面, 屏幕全触摸, 中/英文界面
内置15.4寸高亮触摸屏, 并可扩展一个17寸触摸屏
支持Art-Net扩展, 共支持12个DMX接口-6144通道
20个场景及跑灯主控
超过1000个的虚拟重放
与珍珠专家演出文件完全兼容
10个宏按钮和宏库
Artnet Avotalk和CIP protocol协议支持
支持CIP多媒体素材协议
超过1000个世界主流灯具灯库,
并内置Personality Builder灯库写入软件

SPECIFICATIONS

Live and powerful Cue List control
New intuitive titan Operating System
Responsive wide screen interface
Can Support 12 DMX universes-6144 channels
20 submasters for Cues, Cue Lists and Chases
Over 1000 virtual Playback Executors
Full showfile compatibility with Pearl Expert
10 direct Macro buttons and Macro library
Support of Artnet, Avotalk and CIP protocols
Built in personality builder software

MF-K1024
金刚1024控台
King Kong 1024 Console



技术参数

DMX512/1990标准, 最大1024个DMX控制通道, 两路光隔离信号输出。最大控制96台电脑灯或96路调光。使用珍珠灯库(R20格式灯库), 且控台上可自行编写灯库。带背光LCD显示屏, 首创的中英文显示可切换界面。面板中英文可选。内置图形轨迹发生器, 有135个内置图形, 每个场景可保存图形数量5个; 同时可运行图形数量10个。可储存60个素材, 支独享素材, 可储存60个重演场景, 用于储存多步场景和单步场景。每个多步场景最多可储存600个单步。
可同时输出和运行10个重演场景。

SPECIFICATIONS

DMX512/1990 standard, maximum 1024 DMX control channels, two optically isolated signal outputs. Maximum control of 96 scanners or 96 channels of dimming. Pearl light library (R20 format light library) is used, and the light library can be programmed on the console itself. With backlit LCD display, the first Chinese and English display can be switched. Panels are available in English and Chinese. Built-in graphic trajectory generator, there are 135 built-in graphics, each scene can save the number of graphics 5; the number of graphics can run 10 at the same time. Can store 60 materials, exclusive materials, can store 60 replay scenes for storing multi-step scenes and single-step scenes. Each multi-step scene can store up to 600 single steps.
Can output and run 10 replay scenes at the same time.

控台系列 Console Series

MF-Y600
双雾机
Double Fog Machine



技术参数

电压: 110V/220V-250V/50-60Hz
功率: 600W
控制方式: 定时定量线控、DMX512
预热时间: 12分钟
油瓶容量: 2.5公升
耗油量: (100%输出): 45分钟/公升
喷烟量: 3500cu.ft/min
重量: 20kg
尺寸: 630x290x290mm

SPECIFICATIONS

Voltage: 110V / 220V-250V / 50-60Hz
Power: 600W
Control mode: timing quantitative control, DMX512
Warm-up time: 12 minutes
Oil bottle capacity: 2.5 liters
Fuel consumption: (100% output): 45 minutes / liter
Amount of smoke: 3500cu.ft / min
Weight: 20 kg
Size: 630x290x290mm

MF-Y3000
水雾机
Water fog machine



技术参数

电压: 110V 60HZ / 220V 50HZ
控制方式: 数码显示、遥控控制、控台控制
耗材: 水雾油, 普通自来水, 水温在25-40度适宜
覆盖面积: 约100平方
DMX通道: 2CH
重量: 47KG
尺寸: 960*490*540mm

SPECIFICATIONS

Voltage: 110V 60HZ / 220V 50HZ
Control: Digital display, remote control, console control
Supplies: water mist oil, ordinary tap water, water temperature at 25-40 degrees suitable
Cover area: about 100 square feet
DMX channel: 2CH
Weight: 47KG
Size: 960 * 490 * 540mm

MF-F08
八路放大器 (带光感隔离)
8Ways Amplifier
(with light sensing isolation)



技术参数

数字信号类型: DMX512/1990
1路输入, 1路直通输出 (非隔离)
8路光隔离信号分配输出
各输入输出接口之间的电气隔离电压:
>1000V数字信号指示灯
DMX信号输入连接器: XLR-D3M/
XLR-D5M
DMX信号直通输出连接器: XLR-D3F/
XLR-D5F
DMX信号分配输出连接器: XLR-D3Fx4/
XLR-D5F
电源: AC200~240V, 50/60Hz
尺寸: 483x44.5x140(mm)
重量: 4kg

SPECIFICATIONS

Suit: DMX512 signal / 1990.
Improve the loss of signal during long-range transmission.
1 input and 1 thru output (not isolated)
8 distribute output (with optical isolated)
DMX input connector: XLR-D3M/XLR-D5M
DMX thru output connector: XLR-D3F/XLR-D5F
DMX distribute output connector:
XLR-D3Fx4/XLR-D5F
Power supply: AC200~240V, 50/60Hz
Size: 483x49.5x140 mm
Weight: 4kg

MF-F04
四路放大器 (带光感隔离)
4Ways Amplifier
(with light sensing isolation)



技术参数

数字信号类型: DMX512/1990
1路输入, 1路直通输出 (非隔离)
4路光隔离信号分配输出
各输入输出接口之间的电气隔离电压:
>1000V数字信号指示灯
DMX信号输入连接器: XLR-D3M/
XLR-D5M
DMX信号直通输出连接器: XLR-D3F/
XLR-D5F
DMX信号分配输出连接器: XLR-D3Fx4/
XLR-D5F
电源: AC200~240V, 50/60Hz
尺寸: 440x140x40(mm)
重量: 3kg

SPECIFICATIONS

Suit: DMX512 signal / 1990.
Improve the loss of signal during long-range transmission.
1 input and 1 thru output (not isolated)
4 distribute output (with optical isolated)
DMX input connector: XLR-D3M/XLR-D5M
DMX thru output connector: XLR-D3F/XLR-D5F
DMX distribute output connector: XLR-D3Fx4/
XLR-D5F
Voltage: AC200V, 50/60Hz
Size: 440x140x40 mm
Weight: 3kg