


Leading the  
**LED screens** integrated  
solutions provider



FIRST


A large-scale indoor LED display is shown in a dark auditorium. The screen displays the word 'FIRST' in large, white, sans-serif capital letters. The background of the screen is a vibrant, abstract pattern of overlapping circles in shades of red, orange, and yellow. Below the screen, a circular stage is lit up, with two people standing on it. The audience is visible in the foreground, mostly in silhouette.

Media Fix™ Series  
Indoor LED Display

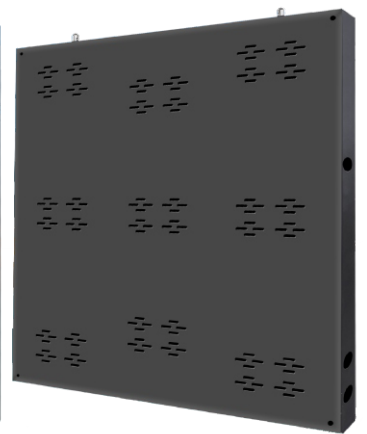


# Features

## Color Gamut of HDTV,ZhongBo,and UHDTV

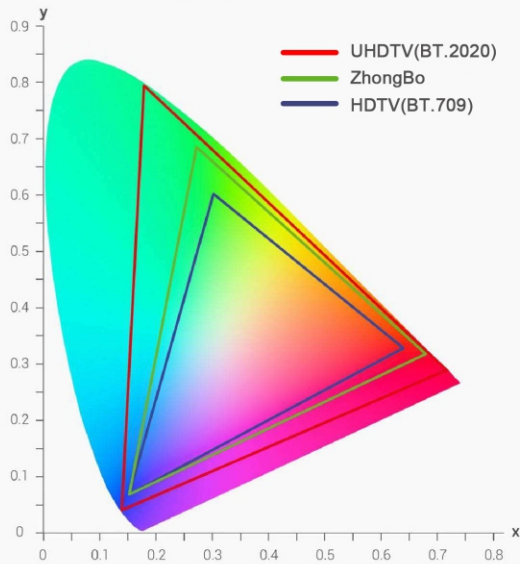


- Wide view angle with professional processing moire technology, to meet the requirement for multiple filming angles.

- Wide view angle with professional processing moire technology, to meet the requirement for multiple filming angles.

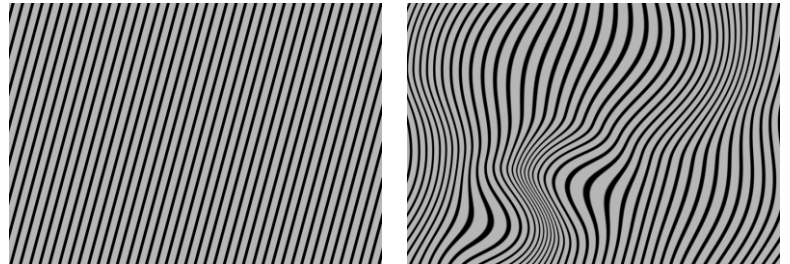

- High refresh rate and gray scale, reliable quality to apply to various scenes.

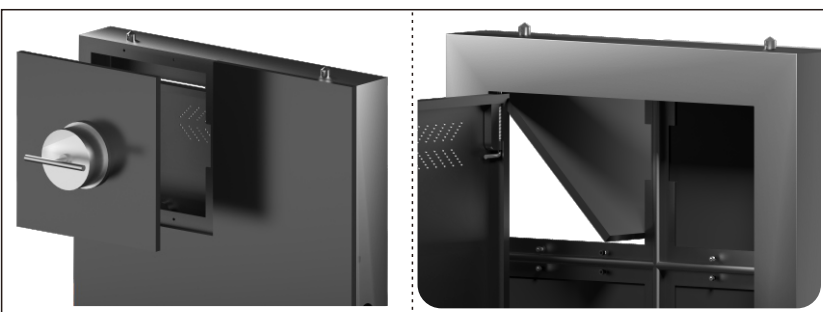

- Magnetic suction standardization module design, optional front/back maintenance, to improve efficiency and save installation cost.

## Parameters

	ITEM	MFI-3	MFI-3.91	MFI-4	MFI-4.81	MFI-5	MFI-6
LED Module	LED	SMD 3 IN 1					
	Pixel Pitch (mm)	3	3.91	4	4.81	5	6
	Module Resolution (WxH)	64x64		64x32	52x52	64x32	32x32
	Module Size (WxH)	192x192	250x250	256x128	250x250	320x160	192x192
	Module Weight (kg/pcs)	0.31	0.54	0.22	0.54	0.28	0.22
	Module Quantity (WxH)	4x4		4x8	4x4	3x6	5x5
Cabinet	Cabinet Resolution	256x256		256x256	208x208	192x192	160x160
	Cabinet Size (WxH mm)	768x768	1000x1000	1024x1024	1000x1000	960x960	
	Pixel Density	111,111	65,536	62,500	43,264	40,000	27,778
	Weight (kg/m <sup>2</sup> )	35-40					
	Cabinet Material	Iron					
	Ingress Protection	IP30					
	Maintenance	Front/Rear Optional					
Electrical Parameter	Color Temperature (K)	3200-12000 (Adjustable)					
	Brightness (nit)	700-1000					
	View Angle	H.140° / V.140°		H.120° / V.120°			
	Contrast Ratio	4000:1					
	Max Power Consumption(W/m <sup>2</sup> )	500					
	Average Power Consumption(W/m <sup>2</sup> )	166					
	Working Voltage(V)	AC110/220V					
	Refresh Rate (HZ)	≥3840					
Usage Environment	Life (H)	50,000					
	Working Temperature (°C)	-10°C ~ +40°C					
	Storage Temperature (°C)	-20°C ~ +60°C					
	Working Humidity(RH)	10 ~ 60%					
	Storage Humidity(RH)	10 ~ 60%					
	Application	Indoor Only					

Zhongbo reserves the right of interpretation for the parameters.



## SHENZHEN ZHONGBO PHOTOELECTRIC CO.,LTD

Address: 3rd Floor, 5th Building, Fulongte Technology Park, Huaxing Road, Dalang, Longhua District, 518109, Shenzhen, Guangdong, P.R.China.

Tel phone: 0086-755-29043232

Website: <https://www.zhongbo-gd.com>